

MICKEY THOMPSON



TIRES & WHEELS

2020

PRODUCT CATALOG



CONTENTS

LIGHT TRUCK TIRES

DEEGAN 38™ ALL-TERRAIN.....	6
DEEGAN 38™	7
BAJA ATZ P3™	8
BAJA MTZ P3™	9
BAJA BOSS® M/T.....	10-11

EXTREME TIRES

BAJA PRO™ XS.....	12-13
BAJA PRO™ X.....	14-15
BAJA BOSS® X.....	16
BAJA PRO™	17
MINI MAG™	17

WHEELS

CLASSIC III™ BLACK	18
CLASSIC III™	19
SIDEBITER® II	20
CLASSIC BAJA LOCK™	21
REPLACEMENT CAPS.....	22
TIRE/WHEEL WARRANTY	23

DRAG TIRES

ET DRAG®	24-25
ET DRAG® PRO DRAG RADIAL	26
PRO BRACKET RADIAL	27
ET STREET® R.....	28
ET STREET® R BIAS	28
ET STREET® S/S®	29
ET STREET® RADIAL PRO	29
ET FRONT™	30
ET JR.®	30
ET DRAG® MOTORCYCLE.....	31
M/T® NATURAL RUBBER TUBES ..	32
COMPOUND CONSTRUCTION	33

STREET TIRES

STREET COMP™	34
SPORTSMAN S/T™	35
SPORTSMAN S/R™	36
SPORTSMAN PRO®	37
SPORTSMAN FRONT™	37

MORE M/T®

PROMO/P.O.P. MATERIALS	38
M/T® APPAREL.....	39

TRUCK/JEEP®

DRAG/STREET

MICKEY THOMPSON

PROUDLY MADE IN **USA**

M/T HAS THE LARGEST LINE OF SPECIALTY TIRES IN THE ENTIRE INDUSTRY, NO ONE ELSE COMES CLOSE!

M/T TRUCK TIRES ARE PURPOSE BUILT FOR MILD TO EXTREME OFF-ROADING, 4X4 TRAIL RIDES, ROCK CRAWLING AND OVERLANDING. THESE TIRES ARE ALSO AN EXCELLENT CHOICE FOR SHOW AND COMMERCIAL TRUCK APPLICATIONS.

M/T TRUCK TIRES ARE PROUDLY MADE IN USA!





M/T DEEGAN 38 SERIES

DEEGAN 38TM
ALL-TERRAIN

The Deegan 38 All Terrain by Mickey Thompson is engineered with an all terrain tread pattern and proprietary compounds. The durable construction is an excellent upgrade for today's light trucks and SUVs. The Deegan 38 All-Terrain comes with a 60,000 mile limited treadwear warranty on “SUV” sizes and a 55,000 mile limited treadwear warranty on “LT” sizes.

- Silica-reinforced tread compound for all weather performance, cut/chip resistance and longevity
- High-tensile body cord for reduced weight, increased durability and improved ride
- Variable-draft angles and tread edge chamfers help to reduce stone retention
- Angled shoulder scallops and two-pitch Sidebiters[®] pattern provide increased off-road traction
- Tread element tie-bars improve stability and responsiveness

MATERIAL NUMBER	PART #	TIRE SIZE	EQUIV. SIZE	LOAD RANGE	SIDE WALL	SERVICE DESC.*	(MEAS. RIM WD.) APPD. RIM WIDTH INCHES	MAX. INFL. PSI	MAX. LOAD LBS.*	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
90000029727	51501	235/75R15	29X9.00R15	XL	RWL	I09T	(6.5) 6.0 - 8.0	50	2,271	28.7	9.3	6.7	14.0	34
90000035200	51510	31X10.50R15LT	-	C	RWL	I09R	(8.5) 7.0 - 9.0	50	2,270	30.2	10.6	8.3	16.5	43
90000029549	51600	LT225/75R16	29X8.50R16	E	BLK	I15R	(6.0) 6.0 - 7.0	80	2,680	29.3	8.5	7.0	16.5	38
90000029728	51601	235/70R16	29X9.00R16	STD	RWL	I06T	(7.0) 6.0 - 8.0	44	2,094	28.8	9.4	7.4	13.5	34
90000029610	51610	LT245/70R16	30X9.50R16	E	RWL	I18R	(7.0) 6.5 - 7.0	80	2,910	29.5	9.8	7.9	16.5	43
90000029729	51611	255/70R16	30X10.00R16	STD	RWL	I11T	(7.5) 6.5 - 8.5	44	2,403	30.0	10.2	8.0	14.0	37
90000029611	51620	LT245/75R16	31X9.50R16	E	RWL	I20R	(7.0) 6.5 - 8.0	80	3,042	30.4	9.7	7.5	16.5	43
90000029940	51621	265/70R16	31X10.50R16	STD	RWL	I12T	(8.0) 7.0 - 9.0	44	2,469	30.4	10.8	8.3	14.0	40
90000029612	51630	LT265/70R16	31X10.50R16	E	RWL	I21R	(8.0) 7.0 - 8.5	80	3,195	30.6	10.9	8.6	16.5	47
90000029941	51631	265/75R16	32X10.50R16	STD	RWL	I16T	(7.5) 7.0 - 9.0	44	2,756	31.6	10.5	7.7	14.0	41
90000029613	51640	LT265/75R16	32X10.50R16	E	RWL	I23R	(7.5) 7.0 - 8.0	80	3,415	31.6	10.6	7.8	16.5	50
90000035201	51660	LT285/75R16	33X11.50R16	E	RWL	I26R	(8.0) 7.5 - 9.0	80	3,750	32.6	11.6	8.9	17.0	54
90000029615	51700	LT265/65R17	31X10.50R17	E	RWL	I20R	(8.0) 7.5 - 9.5	80	3,085	30.5	10.7	8.7	16.0	47
90000034876	51721	265/65R17	31X10.50R17	STD	RWL	I12T	(8.0) 7.5 - 9.5	44	2,469	30.6	10.6	8.5	13.0	40
90000029942	51701	275/65R17	31X11.00R17	STD	RWL	I15T	(8.0) 7.5 - 9.5	44	2,679	30.9	11.2	9.3	13.0	41
90000029943	51711	265/70R17	32X10.50R17	STD	RWL	I15T	(8.0) 7.0 - 9.0	44	2,679	31.4	10.7	8.3	14.0	43
90000029616	51710	LT265/70R17	32X10.50R17	E	RWL	I21S	(8.0) 7.0 - 8.5	80	3,195	31.7	10.9	8.6	16.5	50
90000029617	51720	LT275/70R17	32X11.00R17	E	RWL	I21R	(8.0) 7.0 - 8.5	80	3,195	32.2	11.0	8.9	16.5	51
90000029618	51730	LT285/65R17	32X11.50R17	E	RWL	I21S	(8.5) 8.0 - 10.0	80	3,195	31.6	11.5	9.4	16.0	51
90000035202	51750	LT285/70R17	33X11.50R17	E	RWL	I21S	(8.5) 7.5 - 9.0	80	3,195	32.8	11.4	9.1	17.0	56
90000034851	51830	LT265/60R18	31X10.50R18	E	BLK	I19S	(8.0) 7.5 - 9.5	80	3,000	30.5	10.7	8.8	16.0	49
90000029944	51801	265/60R18	31X10.50R18	STD	RWL	I10T	(8.0) 7.5 - 9.5	44	2,337	30.6	10.7	8.6	12.5	38
90000029945	51811	265/65R18	32X10.50R18	STD	RWL	I14T	(8.0) 7.5 - 9.5	44	2,601	31.5	10.7	8.5	13.0	42
90000034853	51831	285/60R18	32X11.50R18	XL	RWL	I20T	(8.5) 8.0 - 10.0	50	3,086	31.3	11.4	9.5	12.5	43
90000029946	51821	275/65R18	32X11.00R18	STD	RWL	I16T	(8.0) 7.5 - 9.5	44	2,756	32.1	11.0	8.7	13.0	42
90000034969	51840	LT285/60R18	32X11.50R18	E	RWL	I22S	(8.5) 8.0 - 10.0	80	3,305	31.5	11.5	9.5	16.0	54
90000035203	51850	LT275/70R18	33X11.00R18	E	RWL	I25S	(8.0) 7.0 - 8.5	80	3,640	33.2	11.1	8.9	16.0	57
90000035204	51860	LT285/65R18	33X11.50R18	E	RWL	I25S	(8.5) 8.0 - 10.0	80	3,640	32.6	11.6	9.4	16.0	57
90000035205	51870	LT295/70R18	34X12.00R18	E	BLK	I29S	(8.5) 7.5 - 10.0	80	4,080	34.3	12.0	9.4	17.0	60
90000030281	51021	265/50R20	31X10.50R20	XL	RWL	I11T	(8.5) 7.5 - 9.5	50	2,403	30.5	10.9	8.8	12.0	40
90000029947	51001	275/55R20	32X11.00R20	XL	RWL	I17T	(8.5) 7.5 - 9.5	50	2,833	31.9	10.9	9.1	12.5	43
90000034854	51031	285/50R20	32X11.50R20	XL	RWL	I16T	(9.0) 8.0 - 10.0	50	2,756	31.2	11.3	9.7	12.5	43
90000029948	51011	275/60R20	33X11.00R20	STD	RWL	I15T	(8.0) 7.5 - 9.5	44	2,679	33.0	10.9	8.9	12.5	45
90000035206	51030	LT285/55R20	33X11.50R20	E	BLK	I22R	(9.0) 8.0 - 10.0	80	3,305	32.4	11.7	9.7	16.0	58
90000035207	51040	LT295/60R20	34X12.00R20	E	BLK	I26S	(8.5) 8.0 - 10.0	80	3,750	34.1	11.5	9.7	16.5	61
90000035208	51050	35X12.50R20LT	-	E	BLK	I21R	(10.0) 8.5 - 11.0	65	3,195	34.7	12.5	10.0	16.5	65
90000029949	51201	285/45R22	32X11.50R22	XL	BLK	I14T	(9.5) 9.0 - 10.5	50	2,601	32.0	11.3	9.9	12.0	45
90000029950	51211	305/45R22	33X12.50R22	XL	BLK	I18T	(10.0) 9.5 - 11.5	50	2,910	32.7	12.0	10.3	12.0	48

*SERVICE DESCRIPTION AND MAX LOAD, DATA IS FOR SINGLE REAR TIRE APPLICATIONS.

M/T DEEGAN 38 SERIES


DEEGAN 38TM
MUD-TERRAIN

The Deegan 38 by Mickey Thompson is a champion proven mud terrain tire offering rugged looks, long lasting tread-life and versatility. The Deegan 38 is designed and engineered with Uncompromised Construction.

- Proven compound with extra tread-depth for long-life and deep traction
- High-tensile body cord for increased durability with reduced weight and improved ride
- Wider outer-void and angled shoulder scallops plus SideBiters[®] for outstanding off-road traction
- Tighter inner-void with large surface area elements for improved handling and quieter ride
- Variable draft angles, tread edge chambers and stone ejectors reduce stone retention

MATERIAL NUMBER	PART #	TIRE SIZE	EQUIV. SIZE	LOAD RANGE	SIDE WALL	SERVICE DESC.*	(MEAS. RIM WD.) APPD. RIM WIDTH INCHES	MAX. INFL. PSI	MAX. LOAD LBS.*	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
90000021037	56510	31X10.50R15LT	-	C	RWL	I09Q	(8.5) 7.0 - 9.0	50	2,270	30.6	10.4	8.2	19.0	45
90000020917	56521	32X11.50R15LT	-	C	RWL	I13Q	(9.0) 8.0 - 10.0	50	2,535	31.6	11.3	9.0	19.0	50
90000020918	56532	33X12.50R15LT	-	C	RWL	I08Q	(10.0) 8.5 - 11.0	35	2,205	32.6	12.4	9.8	20.0	55
90000031185	56552	35X12.50R15LT	-	C	RWL	I13Q	(10.0) 8.5 - 11.0	35	2,535	34.7	12.2	9.9	20.0	61
90000026000	56620	LT265/75R16	32X10.50R16LT	E	RWL	I23Q	(7.5) 7.0 - 8.0	80	3,415	31.7	10.1	8.0	18.5	48
90000026001	56631	LT265/75R16	33X11.50R16LT	E	RWL	I26Q	(8.0) 7.5 - 9.0	80	3,750	32.8	11.3	8.6	18.5	56
90000020919	56632	LT305/70R16	33X12.50R16	E	RWL	I24Q	(9.0) 8.0 - 9.5	65	3,525	32.7	12.0	9.7	19.0	56
90000021035	56652	LT315/75R16	35X12.50R16	E	RWL	I27Q	(8.5) 8.0 - 11.0	65	3,860	34.7	12.2	9.9	19.5	62
90000026002	56720	LT265/70R17	32X10.50R17LT	E	RWL	I21Q	(8.0) 7.0 - 8.5	80	3,195	31.7	10.8	8.4	18.5	50
90000026003	56731	LT285/70R17	33X11.50R17LT	E	RWL	I21Q	(8.5) 7.5 - 9.0	80	3,195	32.9	11.5	9.1	18.5	56
90000021041	56732	LT305/65R17	33X12.50R17	E	RWL	I21Q	(9.0) 8.5 - 11.0	65	3,195	32.8	12.1	9.9	19.5	57
90000021042	56752	LT315/70R17	35X12.50R17	D	RWL	I21Q	(9.5) 8.0 - 11.0	50	3,195	34.5	12.8	10.0	19.5	63
90000031186	56759	35X12.50R17LT	-	D	RWL	I19Q	(10.0) 8.5 - 11.0	50	3,000	34.8	12.7	9.8	20.0	64
90000021036	56772	37X12.50R17LT	-	D	BLK	I24P	(10.0) 8.5 - 11.0	50	3,525	36.7	13.1	9.9	21.0	70
90000021045	56832	LT305/60R18	33X12.50R18	E	RWL	I21Q	(9.0) 8.5 - 11.0	65	3,195	32.5	12.1	9.9	19.5	60
90000031187	56859	35X12.50R18LT	-	D	RWL	I18Q	(10.0) 8.5 - 11.0	50	2,910	34.8	12.5	9.9	20.0	64
90000021043	56852	LT305/70R18	35X12.50R18	E	RWL	I26Q	(9.0) 8.5 - 10.0	65	3,750	35.0	12.1	9.9	19.5	65
90000021044	56232	LT305/55R20	33X12.50R20	E	BLK	I21Q	(9.5) 8.5 - 11.0	65	3,195	33.3	12.5	10.1	19.5	61
90000021040	56252	35X12.50R20LT	-	E	BLK	I21Q	(10.0) 8.5 - 11.0	65	3,195	34.7	12.4	9.9	20.0	65
90000021046	56272	37X12.50R20LT	-	E	BLK	I26P	(10.0) 8.5 - 11.0	65	3,750	36.6	12.3	9.9	21.0	71

*SERVICE DESCRIPTION AND MAX LOAD, DATA IS FOR SINGLE REAR TIRE APPLICATIONS.

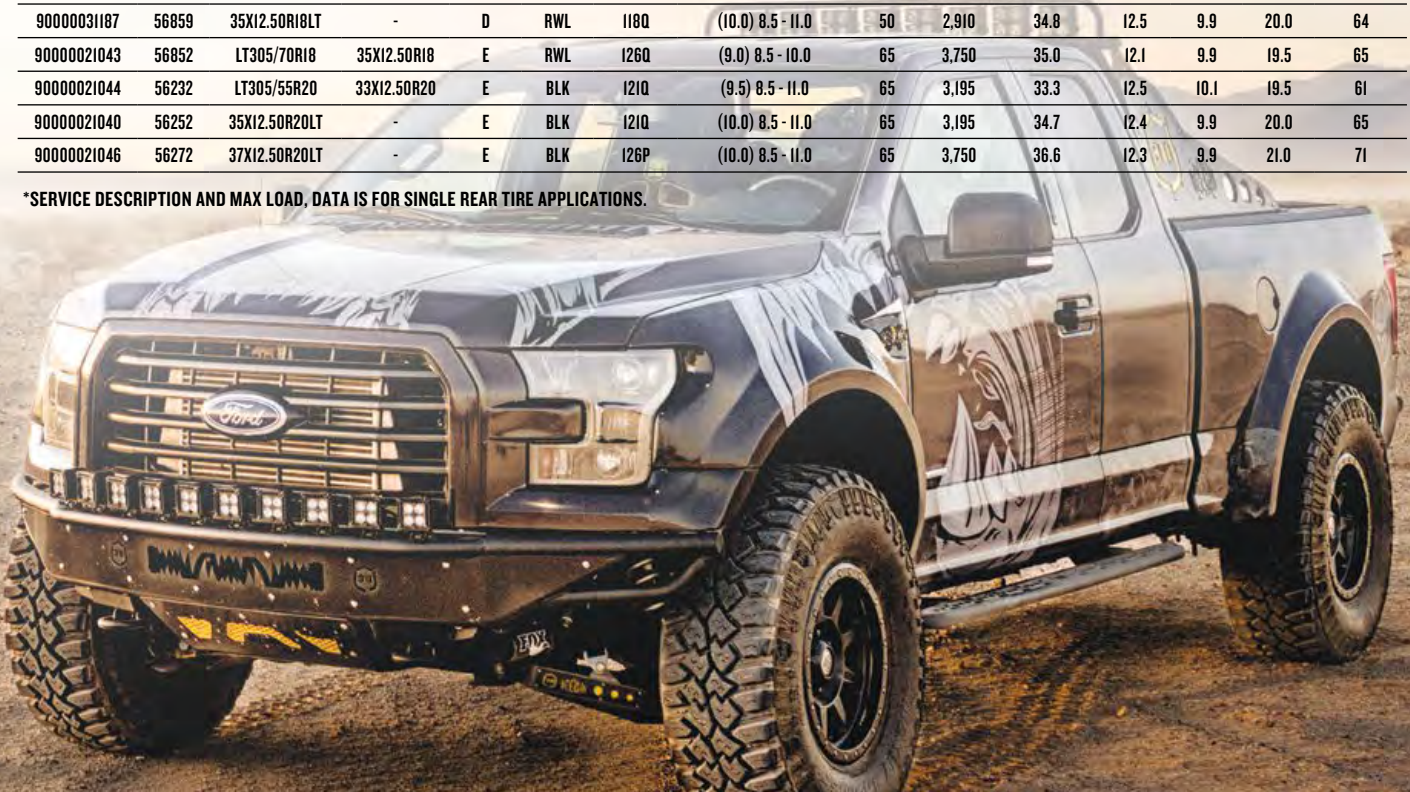



BAJA ATZ^{P3}[™]

HYBRID ALL-TERRAIN

The Baja ATZ^{P3}[™] has a unique “hybrid” design between an all-terrain and mud terrain to give you the grip you need for your weekend adventures and the smooth ride to get you down the road in comfort. Features an extra wide footprint and beefy tread blocks for great all around traction.

- Silica-reinforced tread compound for enhanced wet performance, cut/chip resistance and longevity
- Powerply[™] 3-ply sidewall construction for sidewall protection and responsive handling
- Large surface area tread elements for all-terrain like handling and ride characteristics
- Wide lateral & circumferential voids for mud terrain like off-road traction
- Aggressive Sidebiters[®] for improved protection and off-road traction
- Scalloped shoulder lugs for improved off-road traction

ALL SIZES FEATURE **POWERPLY** CONSTRUCTION ^{M/T}

MATERIAL NUMBER	PART #	TIRE SIZE	EQUIV. SIZE	LOAD RANGE	SIDE WALL	SERVICE DESC.*	(MEAS. RIM WD.) APPD. RIM WIDTH INCHES	MAX. INFL. PSI	MAX. LOAD LBS.*	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
90000001902	55510	31X10.50R15LT	-	C	BLK	I09Q	(8.5) 7.0 - 9.0	50	2,270	30.8	10.7	8.4	18.5	45
90000001912	55532	33X12.50R15LT	-	C	BLK	I08Q	(10.0) 8.5 - 11.0	35	2,205	32.8	12.6	9.9	18.5	59
90000001913	55621	LT265/75R16	32X10.50R16	E	BLK	I23Q	(7.5) 7.0 - 8.0	80	3,415	32.0	10.7	8.2	18.5	55
90000001914	55631	LT285/75R16	33X11.50R16	E	BLK	I26Q	(8.0) 7.5 - 9.0	80	3,750	32.9	11.7	9.3	18.5	64
90000001915	55632	LT305/70R16	33X12.50R16	E	BLK	I24Q	(9.5) 8.0 - 9.5	65	3,525	33.1	12.0	10.0	18.5	65
90000001916	55652	LT315/75R16	35X12.50R16	E	BLK	I27Q	(8.5) 8.0 - 11.0	65	3,860	34.5	12.5	10.0	18.5	68
90000001917	55721	LT265/70R17	32X10.50R17	E	BLK	I21Q	(8.0) 7.0 - 8.5	80	3,195	31.9	10.7	8.7	18.5	55
90000001918	55731	LT285/70R17	33X11.50R17	E	BLK	I21Q	(8.5) 7.5 - 9.0	80	3,195	33.0	11.5	9.3	18.5	62
90000001919	55732	LT305/65R17	33X12.50R17	E	BLK	I21Q	(9.0) 8.5 - 11.0	65	3,195	32.6	12.3	10.0	18.5	64
90000022366	55742	LT295/70R17	34X12.00R17	E	BLK	I21Q	(8.5) 7.5 - 10.0	80	3,195	33.4	12.0	9.8	18.5	65
90000031442	55759	35X12.50R17LT	-	D	BLK	I19Q	(10.0) 8.5 - 11.0	50	3,000	34.4	12.7	10.0	18.5	66
90000001940	55752	LT315/70R17	35X12.50R17	D	BLK	I21Q	(9.5) 8.0 - 11.0	50	3,195	34.6	12.8	10.0	18.5	66
90000001941	55772	37X12.50R17LT	-	D	BLK	I24P	(10.0) 8.5 - 11.0	50	3,525	36.9	13.1	10.3	18.5	78
90000001942	55831	LT275/70R18	33X11.00R18	E	BLK	I25Q	(8.0) 7.0 - 8.5	80	3,640	33.1	11.1	9.0	18.5	62
90000001943	55832	LT305/60R18	33X12.50R18	E	BLK	I21Q	(9.0) 8.5 - 11.0	65	3,195	32.6	12.1	10.0	18.5	64
90000001944	55852	LT305/70R18	35X12.50R18	E	BLK	I26Q	(9.0) 8.5 - 10.0	65	3,750	35.1	12.5	10.0	18.5	70
90000031443	55859	35X12.50R18LT	-	D	BLK	I18Q	(10.0) 8.5-11.0	50	2910	34.5	12.7	10.1	18.6	68
90000001945	55231	LT285/55R20	33X11.50R20	E	BLK	I22Q	(9.0) 8.0 - 10.0	80	3,305	32.6	11.7	9.3	18.5	63
90000001946	55232	LT305/55R20	33X12.50R20	E	BLK	I21Q	(9.5) 8.5 - 11.0	65	3,195	33.4	12.5	10.2	18.5	67
90000001947	55240	LT275/65R20	34X11.00R20	E	BLK	I26Q	(8.0) 7.5 - 9.5	80	3,750	34.2	11.1	9.0	18.5	58
90000001948	55252	35X12.50R20LT	-	E	BLK	I21Q	(10.0) 8.5 - 11.0	65	3,195	34.7	12.5	10.0	18.5	69
90000001949	55272	37X12.50R20LT	-	E	BLK	I26P	(10.0) 8.5 - 11.0	65	3,750	36.7	12.5	10.3	18.5	77
90000026619	55253	LT325/50R22	35X13.00R22LT	E	BLK	I22Q	(10.0) 9.0 - 12.0	65	3,305	34.9	12.9	11.3	18.5	75
90000026770	55273	37X13.50R22LT	-	E	BLK	I23Q	(11.0) 8.5 - 12.0	65	3,415	36.7	13.4	10.7	18.5	84

*SERVICE DESCRIPTION AND MAX LOAD, DATA IS FOR SINGLE REAR TIRE APPLICATIONS.



BAJA MTZ^{P3}[™]

MUD-TERRAIN

The Baja MTZ^{P3}[™] is built on the legacy of a legendary, proven construction and design. The Mickey Thompson proprietary compound and innovative design delivers versatile mud terrain performance that provides excellent traction both on-road and off-road.

- Silica-reinforced tread compound for enhanced wet performance, longevity and cut/chip resistance
- Powerply[™] 3-Ply sidewall construction for sidewall protection and responsive handling
- Four-Pitch Sidebiter[®] pattern grips terrain for additional traction and provides sidewall protection
- Self-cleaning high-void tread pattern and angled shoulder scallops provide additional off-road traction
- Variable draft angles and stone ejectors help to reduce stone retention

ALL SIZES FEATURE **POWERPLY** CONSTRUCTION ^{M/T}

MATERIAL NUMBER	PART #	TIRE SIZE	EQUIV. SIZE	LOAD RANGE	SIDE WALL	SERVICE DESC.*	(MEAS. RIM WD.) APPD. RIM WIDTH INCHES	MAX. INFL. PSI	MAX. LOAD LBS.*	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
90000024178	59510	31X10.50R15LT	-	C	OWL	I09Q	(8.5) 7.0 - 9.0	50	2,270	30.8	10.7	8.5	20.0	47
90000024179	59532	33X12.50R15LT	-	C	OWL	I08Q	(10.0) 8.5 - 11.0	35	2,205	32.7	12.2	9.8	21.0	59
90000024260	59552	35X12.50R15LT	-	C	OWL	I13Q	(10.0) 8.5 - 11.0	35	2,535	34.6	13.1	10.1	21.0	67
90000024261	59620	LT265/75R16	32X10.50R16	E	OWL	I23Q	(7.5) 7.0 - 8.0	80	3,415	31.9	10.7	8.4	18.5	54
90000024262	59631	LT285/75R16	33X11.50R16	E	OWL	I26Q	(8.0) 7.5 - 9.0	80	3,750	33.0	11.2	8.8	19.0	60
90000024263	59632	LT305/70R16	33X12.50R16	E	OWL	I24Q	(9.0) 8.0 - 9.5	65	3,525	33.0	12.3	9.9	19.5	62
90000024264	59652	LT315/75R16	35X12.50R16	E	OWL	I27Q	(8.5) 8.0 - 11.0	65	3,860	34.5	12.6	9.7	20.5	68
90000027739	59665	LT375/65R16	36X15.00R16	D	BLK	I26Q	(11.0) 10.0 - 13.0	50	3,750	35.8	15.2	12.3	23.0	86
90000024266	59720	LT265/70R17	32X10.50R17	E	OWL	I21Q	(8.0) 7.0 - 8.5	80	3,195	31.9	10.7	8.5	18.5	45
90000024267	59731	LT285/70R17	33X11.50R17	E	OWL	I21Q	(8.5) 7.5 - 9.0	80	3,195	33.0	11.5	9.0	19.0	61
90000024268	59732	LT305/65R17	33X12.50R17	E	BLK	I21Q	(9.0) 8.5 - 11.0	65	3,195	32.7	12.3	9.9	21.0	64
90000024269	59742	LT295/70R17	34X12.00R17	E	OWL	I21Q	(8.5) 7.5 - 10.0	80	3,195	33.5	12.0	9.7	21.0	66
90000024270	59752	LT315/70R17	35X12.50R17	E	OWL	I21Q	(9.5) 8.0 - 11.0	65	3,195	34.6	12.6	10.0	21.0	66
90000031233	59759	35X12.50R17LT	-	D	BLK	I19Q	(10.0) 8.5 - 11.0	50	3,000	34.8	12.5	10.0	21.0	66
90000024271	59772	37X12.50R17LT	-	D	BLK	I24Q	(10.0) 8.5 - 11.0	50	3,525	36.8	13.0	10.2	22.0	77
90000027740	59703	40X13.50R17LT	-	C	BLK	I21Q	(11.0) 8.5 - 11.0	35	3,195	39.8	13.6	11.0	22.0	91
90000024272	59831	LT275/70R18	33X11.00R18	E	OWL	I25P	(8.0) 7.0 - 8.5	80	3,640	33.3	11.3	9.1	20.0	62
90000024273	59832	LT305/60R18	33X12.50R18	E	OWL	I21Q	(9.0) 8.5 - 11.0	65	3,195	32.7	12.0	10.1	21.0	65
90000024274	59842	LT295/70R18	34X12.00R18	E	OWL	I29P	(8.5) 7.5 - 10.0	80	4,080	34.5	12.0	9.7	21.0	70
90000031234	59859	35X12.50R18LT	-	D	BLK	I18Q	(10.0) 8.5 - 11.0	50	2,910	34.8	12.5	10.1	21.0	70
90000024275	59852	LT305/70R18	35X12.50R18	E	OWL	I26Q	(9.0) 8.5 - 10.0	65	3,750	35.1	12.4	9.9	21.0	70
90000024276	59873	37X13.50R18LT	-	D	BLK	I24Q	(11.0) 8.5 - 11.0	50	3,525	36.8	13.3	11.0	22.0	82
90000024277	59232	LT305/55R20	33X12.50R20	E	BLK	I21Q	(9.5) 8.5 - 11.0	65	3,195	33.5	12.2	10.4	20.5	69
90000024279	59252	35X12.50R20LT	-	E	BLK	I21Q	(10.0) 8.5 - 11.0	65	3,195	34.7	12.4	10.2	21.0	69
90000027741	59265	36X15.50R20LT	-	E	BLK	I26Q	(12.0) 11.0 - 13.0	65	3,750	36.4	15.4	12.3	21.0	90
90000024280	59273	37X13.50R20LT	-	E	BLK	I27Q	(11.0) 8.5 - 12.0	65	3,860	36.9	13.3	10.8	21.0	82
90000027742	59285	38X15.50R20LT	-	E	BLK	I28Q	(12.0) 11.0 - 13.0	65	3,970	37.8	15.4	12.3	21.0	94
90000027743	59204	40X14.50R20LT	-	D	BLK	I28Q	(12.0) 10.0 - 12.0	50	3,970	39.8	14.4	11.6	22.0	97

*SERVICE DESCRIPTION AND MAX LOAD, DATA IS FOR SINGLE REAR TIRE APPLICATIONS.



EXTREME
SIDE-BITERS®

POWERPLY™
XD

ASYMMETRIC
TREAD
DESIGN



M/T **BAJA SERIES**

BAJA BOSS® M/T

PREMIUM EXTREME MUD TERRAIN

- Asymmetrical tread pattern reduces noise, improves handling and ride
- Extra large four-pitch Sidebiters® for unparalleled off-road traction
- Powerply™ XD adds an extra thick denier cord to the angled third ply providing better puncture resistance, quicker steering response and greater stability
- Stone ejector ribs prevent gravel from being wedged into tread grooves
- Silica-reinforced compound for better wear, cut and chip resistance, improved wet handling and braking
- Sizes from 15-24 inch wheel diameters for a variety of leveled and lifted vehicles
- Several sizes with increased load carrying capacity, including load range F
- Select flotation sizes with reduced loads for lighter duty pickups, SUVs and Jeeps

15 NEW SIZES

MATERIAL NUMBER	PART #	TIRE SIZE	EQUIV. SIZE	LOAD RANGE	SIDE WALL	SERVICE DESC.*	(MEAS. RIM WD.) APPD. RIM WIDTH INCHES	MAX. INFL. PSI	MAX. LOAD LBS.*	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
90000036630	58532	33X12.50R15LT	-	C	BLK	I08Q	(10.0) 8.5 - 11.0	35	2,205	32.7	12.2	9.8	21.0	61
90000036631	58552	35X12.50R15LT	-	C	BLK	I13Q	(10.0) 8.5 - 11.0	35	2,535	34.6	13.1	10.1	21.0	71
90000036632	58631	LT285/75R16	33X11.50R16	E	BLK	I26Q	(8.0) 7.5 - 9.0	80	3,750	33.0	11.2	8.8	19.0	64
90000036633	58652	LT315/75R16	35X12.50R16	E	BLK	I27Q	(8.5) 8.0 - 11.0	65	3,860	34.5	12.6	9.7	20.5	72
90000036634	58731	LT285/70R17	33X11.50R17	E	BLK	I21Q	(8.5) 7.5 - 9.0	80	3,195	33.0	11.5	9.0	19.0	64
90000036636	58732	LT305/65R17	33X12.50R17	E	BLK	I21Q	(9.0) 8.5 - 11.0	65	3,195	32.7	12.3	9.9	21.0	66
90000036635	58739	33X12.50R17LT	-	D	BLK	I14Q	(10.0) 8.5 - 11.0	50	2,600	33.0	12.3	10.4	21.0	66
90000036653	58752	LT315/70R17	35X12.50R17	E	BLK	I21Q	(9.5) 8.0 - 11.0	65	3,195	34.6	12.6	10.0	21.0	70
90000036652	58759	35X12.50R17LT	-	D	BLK	I19Q	(10.0) 8.5 - 11.0	50	3,000	34.8	12.5	10.0	21.0	69
90000036654	58772	37X12.50R17LT	-	D	BLK	I24Q	(10.0) 8.5 - 11.0	50	3,525	36.8	13.0	10.2	22.0	79
90000036655	58703	40X13.50R17LT	-	C	BLK	I21Q	(11.0) 8.5 - 11.0	35	3,195	39.8	13.6	11.0	22.0	92
90000036637	58831	LT285/65R18	33X11.50R18	E	BLK	I25Q	(8.5) 8.0 - 10.0	80	3,640	33.4	11.2	9.5	19.0	64
90000036639	58832	LT305/60R18	33X12.50R18	F	BLK	I26Q	(9.0) 8.5 - 11.0	80	3,750	32.7	12.4	10.1	21.0	67
90000036638	58839	33X12.50R18LT	-	E	BLK	I18Q	(10.0) 8.5 - 11.0	65	2,910	32.7	12.8	10.6	21.0	66
90000036656	58859	35X12.50R18LT	-	D	BLK	I18Q	(10.0) 8.5 - 11.0	50	2,910	34.8	12.5	10.1	21.0	73
90000036657	58852	LT305/70R18	35X12.50R18	E	BLK	I26Q	(9.0) 8.5 - 10.0	65	3,750	35.1	12.4	9.9	21.0	72
90000036640	58031	LT285/55R20	33X11.50R20	E	BLK	I22Q	(9.0) 8.0 - 10.0	80	3,305	32.6	11.7	9.3	18.5	64
90000036658	58032	LT295/55R20	33X12.00R20	E	BLK	I23Q	(9.5) 8.0 - 10.0	80	3,415	33.1	12.3	10.2	20.0	68
90000036641	58039	33X12.50R20LT	-	E	BLK	I14Q	(10.0) 8.5 - 11.0	65	2,600	32.7	12.2	10.7	21.0	68
90000036642	58034	LT305/55R20	33X12.50R20	F	BLK	I25Q	(9.5) 8.5 - 11.0	80	3,640	33.5	12.2	10.4	20.5	70
90000036643	58033	33X13.50R20LT	-	F	BLK	I20Q	(11.0) 9.5 - 12.0	80	3,085	32.6	13.3	11.4	21.0	74
90000036659	58052	35X12.50R20LT	-	F	BLK	I25Q	(10.0) 8.5 - 11.0	80	3,640	34.7	12.4	10.2	21.0	73
90000033770	58053	35X13.50R20LT	-	F	BLK	I26Q	(11.0) 9.5 - 12.0	80	3,750	34.6	13.2	11.1	21.0	81
90000033771	58072	37X12.50R20LT	-	E	BLK	I26Q	(10.0) 8.5 - 11.0	65	3,750	36.7	12.6	10.3	21.0	79
90000033772	58074	37X14.50R20LT	-	E	BLK	I28Q	(12.0) 10.0 - 13.0	65	3,970	36.9	14.5	10.8	21.0	89
90000033773	58085	38X15.50R20LT	-	E	BLK	I28Q	(12.5) 11.0 - 14.0	65	3,970	37.8	15.4	12.3	21.0	94
90000036644	58232	33X12.50R22LT	-	F	BLK	I14Q	(10.0) 8.5 - 11.0	80	2,600	32.7	12.3	10.9	21.0	66
90000033774	58252	35X12.50R22LT	-	F	BLK	I21Q	(10.0) 8.5 - 11.0	80	3,195	34.8	12.3	10.4	21.0	76
90000033775	58253	LT325/50R22	35X13.00R22	F	BLK	I27Q	(10.0) 9.0 - 12.0	80	3,860	35.1	12.9	11.4	21.0	80
90000033776	58273	37X13.50R22LT	-	F	BLK	I28Q	(11.0) 8.5 - 12.0	80	3,970	36.9	13.4	10.8	21.0	82
90000033777	58285	38X15.50R22LT	-	E	BLK	I28Q	(12.0) 11.0 - 14.0	65	3,970	37.8	15.4	12.3	21.0	94
90000033778	58474	37X14.50R24LT	-	F	BLK	I25Q	(11.5) 10.0 - 13.0	80	3,640	37.0	14.1	10.8	21.0	88
90000033779	58485	38X15.50R24LT	-	F	BLK	I28Q	(12.0) 11.0 - 14.0	80	3,970	38.0	14.9	12.3	21.0	95

HIGHLIGHTED YELLOW ROW INDICATES NEW SIZES *SERVICE DESCRIPTION AND MAX LOAD, DATA IS FOR SINGLE REAR TIRE APPLICATIONS.



BAJA PROTM XS

NEW

M/T BAJA SERIES



BAJA PROTM XS

DOT APPROVED EXTREME OFF-ROAD TIRE

- Four-Ply nylon sidewall construction for durability
- Dual decoupling grooves[™] for flexibility on irregular surfaces
- Mud scoops for added cleaning power
- Massive Sidebiters[®] and angled shoulder scallops for ultimate traction and grip
- Symmetric directional tread pattern provides excellent traction and cleaning power
- Designed, developed and manufactured proudly in the USA
- DOT approved for highway use

SUGGESTED USE: ROCK CRAWLING, MUD BOGGING, OR JUST SHOWING OFF!

MATERIAL NUMBER	PART #	TIRE SIZE	LOAD RANGE	SIDE WALL	(MEAS. RIM WD.) APPD. RIM WD. INCHES	MAX. INFL. PSI	MAX. LOAD LBS.*	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
90000036758	41669	19.5/46-16LT	C	BLK	(14.0) 12.0 - 16.0	40	3,970	46.4	21.1	16.5	27.0	149
90000037615	41753	35X13.50-17LT	C	BLK	(11.0) 9.5 - 12.0	30	2,470	34.6	14.0	11.5	27.0	74
90000037616	41783	38X13.50-17LT	D	BLK	(11.0) 9.0 - 11.5	55	3,195	37.9	15.3	11.8	27.0	90
90000037617	41703	40X13.50-17LT	C	BLK	(11.0) 9.0 - 11.5	40	3,195	39.6	15.5	11.7	27.0	99
90000036760	41735	15/43-17LT	C	BLK	(11.5) 9.5 - 12.5	40	3,195	42.3	18.3	13.9	27.0	125
90000036759	41035	15/43-20LT	C	BLK	(11.5) 9.5 - 12.5	40	3,935	42.6	18.0	14.2	27.0	131
90000036757	41069	19.5/46-20LT	C	BLK	(14.0) 12.0 - 16.0	40	3,970	46.3	19.9	16.1	27.0	149
90000036756	41097	17/49-20LT	C	BLK	(13.0) 11.0 - 14.0	40	3,970	47.5	19.9	14.1	27.0	162
90000036754	41049	19.5/54-20LT	C	BLK	(12.0) 12.0 - 16.0	40	3,970	53.7	21.6	16.9	27.0	194
▼ TALLEST STREET LEGAL LIGHT TRUCK TIRE ▼												
90000036753	41481	21/58-24LT	C	BLK	(16.5) 13.5 - 17.5	40	3,970	57.8	22.8	17.6	27.0	233

HIGHLIGHTED YELLOW ROW INDICATES NEW SIZES

*MAX LOAD, DATA IS FOR SINGLE REAR TIRE APPLICATIONS.

BAJA PROTM X

M/T BAJA SERIES

NEW



BAJA PROTM X

BUILT TO PERFORM IN NATURES HARSHTEST CONDITIONS!

- Sticky competition compound provides ultimate grip on hard surfaces
- Pro-Tech ConstructionTM with nylon plies for flexibility and Aramid for protection
- Dual Decoupling Grooves[™] for flexibility on irregular surfaces
- Tread Biter[™] cleats for added traction
- Mud Scoops for added cleaning power
- Massive Sidebiters[®] and angled shoulder scallops for ultimate traction and grip
- Symmetric directional tread pattern provides excellent traction and cleaning power
- Designed, developed and manufactured proudly in the USA
- This tire is not DOT approved

SUGGESTED USE: ROCK BOUNCING, ROCK CRAWLING, MUD BOGGING, OR JUST SHOWING OFF!

OFF-ROAD USE ONLY. NOT STREET LEGAL.

MATERIAL NUMBER	PART #	TIRE SIZE	(MEAS. RIM WD.) APPD. RIM WD. INCHES	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
LIGHT TRUCK SIZES								
90000037613	40773	37X13.50-17LT	(11.0) 9.0-11.5	37.4	13.6	12.6	27.0	85
90000037614	40703	40X13.50-17LT	(11.0) 9.0-11.5	40.1	15.0	12.9	27.0	96
90000031326	40734	43X14.50-17LT	(8.5) 8.5 - 11.0	42.0	16.9	15.0	27.0	114

NOW AVAILABLE IN UTV SIZES!

MATERIAL NUMBER	PART #	TIRE SIZE	(MEAS. RIM WD.) APPD. RIM WD. INCHES	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
NEW UTV SIZES								
90000037610	40400	30X10.0-14	TBD	TBD	TBD	TBD	27.0	TBD
90000037611	40420	32X10.0-14	TBD	TBD	TBD	TBD	27.0	TBD
90000037612	40450	35X10.0-14	TBD	TBD	TBD	TBD	27.0	TBD
90000039500	40500	30X10.0-15	TBD	TBD	TBD	TBD	27.0	TBD
90000039501	40520	32X10.0-15	TBD	TBD	TBD	TBD	27.0	TBD
90000039502	40550	35X10.0-15	TBD	TBD	TBD	TBD	27.0	TBD

HIGHLIGHTED YELLOW ROW INDICATES NEW SIZES



@mischiefmakerJKU

NEW



BAJA BOSS[®] X

COMPETITION PROVEN EXTREME TERRAIN

- Sticky Competition Compound for UNDISPUTED off-road traction
- Extra large four-pitch Sidebiters[®] for unparalleled off-road traction
- Powerply[™] XD adds an extra thick denier cord to the angled third ply providing better puncture resistance, quicker steering response and greater stability
- Stone Ejector Ribs prevent gravel from being wedged into tread grooves
- This tire is not DOT approved

RACE COMPOUND FOR OFF-ROAD USE ONLY

MATERIAL NUMBER	PART #	TIRE SIZE	LOAD RANGE	SIDE WALL	SERVICE DESC.*	(MEAS. RIM WD.) APPD. RIM WD. INCHES	MAX. INFL. PSI	MAX. LOAD LBS.*	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
90000038403	42772	37X12.50R17LT	C	BLK	116F	(10.0) 8.0 - 10.5	35	2,755	36.8	13.0	10.2	22.0	81
90000038404	42703	40X13.50R17LT	B	BLK	115F	(11.0) 8.5 - 11.0	25	2,680	39.8	13.6	11.0	22.0	99

*SERVICE DESCRIPTION AND MAX LOAD, DATA IS FOR SINGLE REAR TIRE APPLICATIONS.



@jordanpellegrino



BAJA PRO[™]

Mickey Thompson Baja Pro[™] off-road tires are specially designed for desert and short course racing. These tires feature a tough bias belted construction for superior strength and impact resistance. Many off-road racers have won on these time tested treads!

- Designed for desert racing
- Tough bias belted construction
- Superior strength and impact resistance
- Anti-cut compound

MATERIAL NUMBER	PART #	TIRE SIZE	(MEAS. RIM WIDTH) APPD. RIM WIDTHS INCHES	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
90000000724	2548	30/7.0-15	(4.0) 3.0 - 6.0	30.0	6.9	4.9	15.0	28
90000000727	2554	33/9.0-15	(7.0) 4.0 - 8.0	33.0	9.6	7.8	11.0	37
90000000728	2555	35/10.0-15	(7.0) 4.0 - 8.0	35.0	10.3	7.8	11.0	40

WARNING: RACE ONLY. NOT FOR STREET USE. TUBES RECOMMENDED. SEE PAGE 33 FOR COMPOUND CONSTRUCTION DATA.



MINI MAG[™]

Mickey Thompson Mini Mag[™] off-road tires are specially designed for desert and short course racing. These tires feature a tough bias belted construction for superior strength and impact resistance. Many off-road racers have won on these time tested treads!

- Designed for desert racing
- Tough bias belted construction
- Superior strength and impact resistance
- Anti-cut compound

MATERIAL NUMBER	PART #	TIRE SIZE	(MEAS. RIM WIDTH) APPD. RIM WIDTHS INCHES	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
900000000726	2551	E78-15	(4.0) 4.0 - 6.0	27.0	6.5	5.2	14.0	21

WARNING: RACE ONLY. NOT FOR STREET USE. TUBES RECOMMENDED. SEE PAGE 33 FOR COMPOUND CONSTRUCTION DATA.

LIFETIME
LIMITED WARRANTY
AGAINST STRUCTURAL DEFECTS
1 YEAR FINISH WARRANTY



15X8 • 6 LUG

M/T CLASSIC SERIES

CLASSIC III™ BLACK

The Mickey Thompson Classic III Black wheel features the classic 8-hole design in a satin black finish with a protective clear coat. The embossed M/T logo is assurance of quality, strength and dependability. The Classic III is available in sizes 15x8 through 17x9.

- Smooth outer lip for clean appearance
- High load rating for strength and durability
- Non-corrosive black screw on center cap

MATERIAL NUMBER	PART #	SIZE	BOLT CIRCLE	BACK SPACE INCHES	OFFSET MM	HUB BORE MM	MAX LOAD LBS.	REPLACEMENT CAP	APPROX. WT. LBS
90000001747	2458421	15X8	5X4.50	3.63	-22	81.48	1,900	90000001587	17
90000001748	2458402	15X8	5X5.50	3.63	-22	106.50	1,900	90000001588	16
90000001749	2458412	15X8	6X5.50	3.63	-22	106.10	1,900	90000001589	16
90000001790	2450421	15X10	5X4.50	3.63	-45	81.48	1,900	90000001587	20
90000001791	2450402	15X10	5X5.50	3.63	-45	106.50	2,500	90000001588	19
90000001792	2468412	16X8	6X5.50	4.50	0	106.10	2,500	90000001589	20
90000001793	2468482	16X8	8X6.50	4.00	-12	125.20	3,250	90000001680	23
90000001794	2479431	17X9	5X5.00	4.50	-12	78.08	2,500	90000001587	27
90000001795	2479402	17X9	5X5.50	4.50	-12	106.50	2,500	90000001588	26
90000001796	2479412	17X9	6X5.50	4.50	-12	106.10	2,500	90000001589	26
90000001797	2479482	17X9	8X6.50	5.00	0	125.20	3,250	90000001680	24

Optional open caps available for 8x6.5 Bolt circle. Optional open caps available for 5x5.5, 6x5.5 & 8x6.5 Bolt circles. For all 6x5.5 Bolt circle wheels: hub centering ring included for late model Chevrolet/GMC applications. Classic series wheels are not compatible with 1986 and earlier JEEP® CJ models. (60-Degree) bulge acorn (cone bulge) seat lug nuts required. Mickey Thompson recommends duplex bulge acorn lug nuts on vehicles of gvwr of 6,500 lbs. Or greater. Center caps are not available for certain applications including 1997 & earlier ford ¾ & 1-Ton pickups, 2002 & earlier Dodge/Ram ¾ & 1-Ton pickups, 1986 & earlier JEEP® CJ models & earlier Toyota Land Cruiser models. See page 22 for cap information.

LIFETIME
LIMITED WARRANTY
AGAINST STRUCTURAL DEFECTS



16X8 • 5 LUG

M/T CLASSIC SERIES

CLASSIC III™

The Mickey Thompson Classic III wheel features the classic 8-Hole design in a highly polished finish that includes matching polished hand holes. The embossed M/T logo is assurance of quality, strength and dependability. The Classic III is available in sizes 15x8 through 17x9.

- Smooth outer lip for clean appearance
- Unique sizing includes 15x12 and 16x12
- Non-corrosive screw on center cap

MATERIAL NUMBER	PART #	SIZE	BOLT CIRCLE	BACK SPACE INCHES	OFFSET MM	HUB BORE MM	MAX LOAD LBS.	REPLACEMENT CAP	APPROX. WT. LBS
90000001718	2358421	15X8	5X4.50	3.63	-22	81.48	1,900	90000001635	17
90000001719	2358402	15X8	5X5.50	3.63	-22	106.50	1,900	90000001670	16
90000001760	2358412	15X8	6X5.50	3.63	-22	106.10	1,900	90000001673	16
90000001761	2350421	15X10	5X4.50	3.63	-45	81.48	1,900	90000001635	19
90000001762	2350402	15X10	5X5.50	3.63	-45	106.50	2,500	90000001670	19
90000001763	2350412	15X10	6X5.50	3.63	-45	106.10	2,500	90000001673	19
90000001764	2352402	15X12	5X5.50	3.63	-73	106.50	2,500	90000001670	22
90000001767	2352412	15X12	6X5.50	3.63	-73	106.10	2,500	90000001673	21
90000001770	2368421	16X8	5X4.50	4.50	0	81.48	1,900	90000001635	21
90000001771	2368402	16X8	5X5.50	4.50	0	106.50	2,500	90000001670	20
90000001773	2368413	16X8	6X5.50	3.63	-22	106.10	2,500	90000001673	22
90000001772	2368412	16X8	6X5.50	4.50	0	106.10	2,500	90000001673	20
90000001775	2368170	16X8	8X170	4.00	-12	125.20	3,500	90000001676	23
90000001774	2368482	16X8	8X6.50	4.00	-12	125.20	3,250	90000001674	23
90000001776	2360412	16X10	6X5.50	4.50	-25	106.10	2,500	90000001673	23
90000001778	2360170	16X10	8X170	4.50	-25	125.20	3,500	90000001676	24
90000001777	2360482	16X10	8X6.50	4.00	-25	125.20	3,250	90000001674	24
90000001780	2362170	16X12	8X170	4.50	-50	125.20	3,500	90000001676	26
90000001779	2362482	16X12	8X6.50	4.50	-50	125.20	3,250	90000001674	26
90000001781	2379431	17X9	5X5.00	4.50	-12	78.08	2,500	90000001635	27
90000001782	2379402	17X9	5X5.50	4.50	-12	106.50	2,500	90000001670	26
90000001784	2379412	17X9	6X5.50	4.50	-12	106.10	2,500	90000001673	26
90000001786	2379170	17X9	8X170	5.00	0	125.20	3,500	90000001676	23
90000001785	2379482	17X9	8X6.50	5.00	0	125.20	3,250	90000001674	24

Optional open caps available for 8x6.5 Bolt circle. Optional open caps available for 5x5.5, 6x5.5 & 8x6.5 Bolt circles. For all 6x5.5 Bolt circle wheels: hub centering ring included for late model Chevrolet/GMC applications. Classic series wheels are not compatible with 1986 and earlier JEEP® CJ models. (60-Degree) bulge acorn (cone bulge) seat lug nuts required. Mickey Thompson recommends duplex bulge acorn lug nuts on vehicles of gvwr of 6,500 lbs. Or greater. Center caps are not available for certain applications including 1997 & earlier ford ¾ & 1-Ton pickups, 2002 & earlier Dodge/Ram ¾ & 1-Ton pickups, 1986 & earlier JEEP® CJ models & earlier Toyota Land Cruiser models. See page 22 for cap information.

LIFETIME
LIMITED WARRANTY
AGAINST STRUCTURAL DEFECTS
1 YEAR FINISH WARRANTY



20X9 • 6 LUG

M/T CLASSIC SERIES

SIDEBITER® II

The Mickey Thompson Sidebiter® II is styled after the revolutionary “tread-on-the-sidewall” Mickey Thompson Sidebiter® tire design. The 7-spoke design is a heavy duty performer with a black satin finish. The Sidebiter® II is available in a complete range of sizes from 15x8 through 22x12.

- All new center cap provides easy access to locking hubs
- High load rating for strength and durability
- Non-corrosive black plastic screw on center cap

MATERIAL NUMBER	PART #	SIZE	BOLT CIRCLE	BACK SPACE INCHES	OFFSET MM	HUB BORE MM	MAX LOAD LBS.	REPLACEMENT CAP	APPROX. WT. LBS
90000019380	3058421	15X8	5X4.50	3.63	-22	81.51	2,000	90000019900	21
90000019383	3050421	15X10	5X4.50	3.63	-48	81.51	2,000	90000019900	25
90000019386	3068412	16X8	6X5.50	4.50	0	106.10	2,600	90000019863	23
90000019387	3068482	16X8	8X6.50	4.50	0	125.20	3,640	90000019864	25
90000019389	3079431	17X9	5X5.00	4.50	-12	78.11	2,600	90000019900	29
90000019402	3079412	17X9	6X5.50	5.00	0	106.10	2,600	90000019863	28
90000019339	3029402	20X9	5X5.50	5.00	0	87.00	2,600	90000019862	38
90000019420	3029462	20X9	6X135	5.00	0	87.00	3,250	90000019863	38
90000019421	3029412	20X9	6X5.50	5.00	0	106.10	3,250	90000019863	38
90000030368	3022163	20X12	6X135/6X5.50	4.75	-44	106.10	2,600	90000030414	42
90000030410	3022170	20X12	8X170	4.75	-44	125.22	3,640	90000019864	46
90000030411	3022180	20X12	8X180	5.25	-32	124.31	3,640	90000019864	46
90000030369	3022482	20X12	8X6.50	4.75	-44	125.22	3,640	90000019864	46
90000030413	3220170	22X10	8X170	5.00	-12	125.22	3,640	90000019864	46
90000030412	3220482	22X10	8X6.50	5.00	-12	125.22	3,640	90000019864	46
90000030364	3222163	22X12	6X135/6X5.50	4.75	-44	106.10	2,600	90000030414	51
90000030366	3222170	22X12	8X170	4.75	-44	125.22	3,640	90000019864	51
90000030367	3222180	22X12	8X180	5.25	-32	124.31	3,640	90000019864	50
90000030365	3222482	22X12	8X6.50	4.75	-44	125.22	3,640	90000019864	51

Optional open caps available for 8x6.5 Bolt circle. Optional open caps available for 5x5.5, 6x5.5 & 8x6.5 Bolt circles. For all 6x5.5 Bolt circle wheels: hub centering ring included for late model Chevrolet/GMC applications. Classic series wheels are not compatible with 1986 and earlier JEEP® CJ models. (60-Degree) bulge acorn (cone bulge) seat lug nuts required. Mickey Thompson recommends duplex bulge acorn lug nuts on vehicles of gvwr of 6,500 lbs. Or greater. Center caps are not available for certain applications including 1997 & earlier ford ¾4 & I-Ton pickups, 2002 & earlier Dodge/Ram ¾4 & I-Ton pickups, 1986 & earlier JEEP® CJ models & earlier Toyota Land Cruiser models. See page 22 for cap information.

LIFETIME
LIMITED WARRANTY
AGAINST STRUCTURAL DEFECTS
1 YEAR FINISH WARRANTY



17X9 • 8 LUG

M/T CLASSIC SERIES

CLASSIC BAJA LOCK™

The Mickey Thompson Classic Baja Lock wheel features the classic 8-hole design in a matte black finish with a protective clear coat. The embossed M/T logo is assurance of quality, strength and dependability. The Classic Baja Lock is available in sizes 15x8 through 17x9

- Simulated bead lock for an authentic look
- High load rating for strength and durability
- Non-corrosive black screw on center cap

MATERIAL NUMBER	PART #	SIZE	BOLT CIRCLE	BACK SPACE INCHES	OFFSET MM	HUB BORE MM	MAX LOAD LBS.	REPLACEMENT CAP	APPROX. WT. LBS
90000020045	1958421	15X8	5X4.50	3.63	-22	81.48	2,000	90000019995	19
90000020046	1958402	15X8	5X5.50	3.63	-22	106.50	2,000	90000019996	18
90000020047	1958412	15X8	6X5.50	3.63	-22	106.10	2,000	90000019997	18
90000020048	1950421	15X10	5X4.50	3.63	-45	81.48	2,000	90000019995	21
90000020049	1950402	15X10	5X5.50	3.63	-45	106.50	2,600	90000019996	21
90000020070	1950412	15X10	6X5.50	3.63	-45	106.10	2,600	90000019997	19
90000020077	1968412	16X8	6X5.50	4.50	0	106.10	2,600	90000019997	22
90000020079	1968482	16X8	8X6.50	4.00	-12	125.20	3,250	90000019998	23
90000020081	1960412	16X10	6X5.50	4.50	-25	106.10	2,600	90000019997	25
90000020082	1960482	16X10	8X6.50	4.50	-25	125.20	3,250	90000019998	26
90000020086	1979431	17X9	5X5.00	4.50	-12	78.08	2,600	90000019995	28
90000020087	1979402	17X9	5X5.50	4.50	-12	106.48	2,600	90000019996	28
90000020089	1979412	17X9	6X5.50	4.50	-12	106.10	2,600	90000019997	27
90000020091	1979170	17X9	8X170	5.00	0	125.20	3,640	90000019999	26
90000020090	1979482	17X9	8X6.50	5.00	0	125.20	3,250	90000019998	26

Optional open caps available for 8x6.5 Bolt circle. Optional open caps available for 5x5.5, 6x5.5 & 8x6.5 Bolt circles. For all 6x5.5 Bolt circle wheels: hub centering ring included for late model Chevrolet/GMC applications. Classic series wheels are not compatible with 1986 and earlier JEEP® CJ models. (60-Degree) bulge acorn (cone bulge) seat lug nuts required. Mickey Thompson recommends duplex bulge acorn lug nuts on vehicles of gvwr of 6,500 lbs. Or greater. Center caps are not available for certain applications including 1997 & earlier ford ¾4 & I-Ton pickups, 2002 & earlier Dodge/Ram ¾4 & I-Ton pickups, 1986 & earlier JEEP® CJ models & earlier Toyota Land Cruiser models. See page 22 for cap information.

REPLACEMENT CAPS



* Center caps ARE NOT available for certain applications including: 1997 & earlier Ford ¾ & 1-Ton Pickups, 2002 & earlier Dodge/ Ram ¾ & 1-Ton Pickups, 1986 & earlier Jeep CJ Models & 1997 & earlier Toyota Land Cruiser Models.

MATERIAL NUMBER	PART #	CAP ASSEMBLY	BOLT CIRCLE	OUTER DIAMETER INCHES	LENGTH INCHES
M/T CLASSIC III					
90000001635	111635	BOLT ON CLOSED CAP	5 X 4.5/5.0	3.35	3.11
90000001670	111670	BOLT ON CLOSED CAP	5 X 5.5	4.41	3.07
90000001675	111675	BOLT ON OPEN CAP	5 X 5.5	4.41	2.76
90000001679	111679	BOLT ON CLOSED CAP	6 X 135	4.13	2.84
90000001677	111677	BOLT ON OPEN CAP	6 X 5.5	4.37	3.54
90000001673	111673	BOLT ON CLOSED CAP	6 X 5.5	4.37	2.87
90000001676	111676	BOLT ON CLOSED CAP	8 X 6.5/170	5.32	4.53
90000001674	111674	BOLT ON CLOSED CAP	8 X 6.5/170	5.32	2.64
90000001678	111678	BOLT ON OPEN CAP	8 X 6.5/170	5.32	3.15
M/T CLASSIC III BLACK					
90000001587	111587	BOLT ON CLOSED CAP	5 X 4.5/5.0	3.35	3.11
90000001588	111588	BOLT ON CLOSED CAP	5 X 5.5	4.41	3.07
90000001589	111589	BOLT ON CLOSED CAP	6 X 5.5	4.37	2.87
90000001681	111681	BOLT ON CLOSED CAP	8 X 170	5.32	4.53
90000001680	111680	BOLT ON CLOSED CAP	8 X 6.5	5.32	2.64
90000001662	111662	BOLT ON OPEN CAP	5 X 5.5	4.41	2.76
90000001663	111663	BOLT ON OPEN CAP	6 X 5.5	4.37	3.54
90000001664	111644	BOLT ON OPEN CAP	8 X 6.5/170	5.32	3.15
M/T CLASSIC BAJA LOCK					
90000019995	1119995	BOLT ON CLOSED CAP	5 X 4.5/5.0	3.11	3.11
90000019996	1119996	BOLT ON CLOSED CAP	5 X 5.5	4.41	3.07
90000020020	11120020	BOLT ON CLOSED CAP	6 X 135	4.13	2.84
90000019997	1119997	BOLT ON CLOSED CAP	6 X 5.5	4.37	2.87
90000019999	1119999	BOLT ON CLOSED CAP	8 X 170	6.81	4.53
90000019998	1119998	BOLT ON CLOSED CAP	8 X 6.5	6.81	2.64
M/T CLASSIC SIDEBITER II					
90000019900	1119900	BOLT ON POP-TOP CLOSED	5X4.50/5.00	4.30	1.50
90000019862	1119862	BOLT ON POP-TOP CLOSED	5X5.50	5.30	1.60
90000019863	1119863	BOLT ON POP-TOP CLOSED	6X5.50/135	5.30	1.60
90000019865	1119865	BOLT ON POP-TOP CLOSED - TALL	8X170	6.50	3.20
90000019864	1119864	BOLT ON POP-TOP CLOSED	8X6.5 / 170 / 180	6.50	2.50
90000030414	1130414	BOLT ON POP-TOP CLOSED	6X5.50/135"	-	-
M/T SD-5					
90000031902	1113935	BOLT ON CLOSED CAP	5X150	5.88	2.80
90000031901	1113835	BOLT ON CLOSED CAP	5X4.50 / 5.00	4.50	2.50
90000031903	1113968	BOLT ON CLOSED STD CAP	8X6.5 / 170 / 180	6.50	2.10
90000031904	1113969	BOLT ON CLOSED TALL CAP	8X6.5 / 170 / 180	6.50	3.80
M/T SIDEBITER LOCK					
90000031902	1113935	BOLT ON CLOSED CAP	5X150	5.88	2.80
90000031905	1112862	BOLT ON CLOSED CAP	5X4.50/5.00/5.50, 6X5.50	6.94	2.50
90000031903	1113968	BOLT ON CLOSED CAP - 16x8 & 17x9	8X6.5 / 170 / 180	6.50	2.10
90000031904	1113969	BOLT ON CLOSED TALL CAP	8X6.5 / 170 / 180	6.50	3.80
90000031907	1112968	BOLT ON CLOSED COVER - 20x9 & 20x12	8X6.5 / 170 / 180	8.44	3.90

TIRE WARRANTY

ELIGIBILITY

This warranty applies to the original purchaser of a Mickey Thompson passenger or light truck tire and is not transferable. Eligible tires must be purchased new and must be used on the vehicle which they were originally installed. Additionally, they must be an equivalent or greater load index to that specified by the vehicle manufacturer. For warranty exclusions, please refer to the complete "Mickey Thompson Passenger and Light Truck Limited Warranty" at mickeythompsonstires.com or contact Mickey Thompson's technical support department at 1-800-222-9092.

STANDARD COVERAGE

If your Mickey Thompson branded tire becomes unserviceable as a result of an eligible adjustable condition during the first 2/32" of tread wear, it will be replaced with an equivalent new Mickey Thompson tire, **FREE OF CHARGE**. When the tread is worn more than 2/32", if the product exhibits an eligible adjustable condition, it will be replaced on a pro rated basis. For the tire pro ration schedule, please refer to the complete "Mickey Thompson Passenger and Light Truck Limited Warranty" at mickeythompsonstires.com or contact Mickey Thompson's technical support department at 1-800-222-9092. You must present proof of purchase and be the original owner when requesting a replacement for your tire.

A replacement charge may be required in order to obtain a replacement tire. The replacement charge will be determined by multiplying the dealer's current selling price by the percentage of original tread depth worn from the tire. You must pay for mounting, balancing, and any other additional charges, such as taxes or the acceptance of a higher priced replacement tire.

Any Mickey Thompson tire that does not deliver satisfactory service due to a balance, out of round or a ride complaint issue will be replaced without charge within the first 2/32nds of the tire's tread life. After the first 2/32nds the tire is not warrantable for the aforementioned conditions.

TREAD LIFE

When the tread becomes worn to 2/32" (1.6mm) anywhere on the tire (shown by tread wear indicators molded into the tread grooves), the tire is worn out. **WARNING**—for important safety information, you must read the section titled "Tire Service Life" and Important Tire Safety and Fitment Information Warnings section of this guide. Additional Tire Safety Information is also available at mickeythompsonstires.com or from your local dealer.

HOW TO OBTAIN AN ADJUSTMENT

Tire adjustments must be presented to the dealer which originally sold the tire. You must be able to provide proof of purchase and be the original owner when requesting a replacement for your tire. See "Where to Go for Warranty Replacement".

NO ROAD HAZARD COVERAGE

Many dealers sell or provide their own warranty coverage for road hazards and/or repairs. Mickey Thompson does not provide this coverage. Check with your dealer to determine if Road Hazard/Repair coverage is available from them.

TREAD WEAR PROTECTION - ELIGIBILITY

This warranty applies to the original purchaser of a replacement Mickey Thompson light truck tire and is nontransferable. Eligible tires must be purchased new and used on the vehicle which they were originally installed. Proof of purchase is required for all warranty claims. Additionally, they must be the size, load index, and speed rating equivalent or greater than that specified by the vehicle manufacturer. This warranty applies to the 48 contiguous continental United States, District of Columbia and Canada. For warranty exclusions see "WHAT ISN'T COVERED" in the Mickey Thompson Standard Warranty.

The following Tread Wear Warranty is a prorated warranty (there is no free replacement period) based on mileage received, and is separate from the Standard Coverage & Extra Coverage Warranties just covered. No manufacturer or dealer can guarantee you a certain number of miles from a given tire. Driving habits, driving conditions, tire and vehicle maintenance all play a part in the tread life of a tire and all differ with each purchaser. The following replacement Mickey Thompson (Deegan 38

All-Terrain) Radial Light Truck tires only are warranted against tread wear out prior to the applicable indicated mileage:

BAJA ATZ P3

+ 45,000-mile Limited Tread Wear Warranty.

DEEGAN 38 ALL-TERRAIN

+ 55,000-mile Limited Tread Wear Warranty on LT sizes.
+ 60,000-mile Limited Tread Wear Warranty on SUV sizes.

The Tread Wear warranty is available provided the eligibility above is met and you:

1. Are the original purchaser.

2. Rotate your tires in accordance with prescribed rotation patterns at least every 6,000 miles (10,000 km) and it must be recorded.

3. Present the tire for adjustment.

4. Present the completed rotation record form when requesting an adjustment and your original purchase receipt, date of purchase, vehicle type, model, odometer reading and rotation record are properly recorded. If the tire wears to the tread wear indicators in less than the miles warranted, a pro-rated adjustment will be made according to actual mileage delivered. Your adjustment credit will be determined by dividing the actual mileage delivered by the miles warranted and multiplying the result times the current selling price of an equivalent Mickey Thompson tire. Adjustment credits can only be used toward the purchase of a new Mickey Thompson tire. You must pay for mounting and balancing and any other additional charges, such as taxes or the acceptance of a higher priced replacement tire.

REPLACEMENT WARRANTY

If you receive a replacement tire under the terms of this Warranty, the replacement tire will be covered by the Warranty then currently given by Mickey Thompson for the replacement tire.

WHERE TO GO FOR WARRANTY REPLACEMENT

Contact the Mickey Thompson dealer where the tire was originally purchased for initial inspection. If the dealer which originally sold the tire is no longer available, please contact Mickey Thompson's technical support department via email at tech@mickeythompsonstires.com or 1-800-222-9092 for assistance in finding a Mickey Thompson dealer (Proof of purchase will be required) You may also visit our website Dealer Locator.

CONDITIONS AND EXCLUSIONS

Any tire, no matter how well constructed, may fail in service or otherwise become unserviceable due to conditions beyond the control of the manufacturer. Nothing in this Warranty is intended to be a representation by Mickey Thompson that tire failure cannot occur.

TIRES: RADIAL VERSUS BIAS

Bias tires tend to ride and handle differently than radials. Bias ply or bias belted and radial tires should not be mixed on the same vehicle.

NO WARRANTY POLICY RACING TIRES AND TUBES

Mickey Thompson offers racing tires and tubes for sale. These products should be used in racing applications only. Due to the many varied and different conditions to which racing tires and tubes are exposed and because of the manner in which racing is conducted, Mickey Thompson makes absolutely no warranty, expressed or implied, as to the fitness for a general or particular purpose or of merchantability in connection with any offer of sale or sale of racing tires and tubes. "MICKEY THOMPSON RACING TIRES OR TIRES USED IN RACING ARE SOLD AS IS". Not all racing tires are designed, tested or labeled to meet the minimum safety and performance requirements of the Federal Motor Vehicle Safety Standards (FMVSS). Tires that do not meet these Federal safety standards can not be sold for use on public highways and should not be used on any public highway in any manner.

CONSUMER RIGHTS

This warranty does not in any way extend to any consequential or incidental damages or losses. All incidental and consequential

damages and losses are hereby expressly disclaimed and excluded from this warranty. There is no other warranty, or liability, expressed or implied, applicable to these products. No representative has the authority to make any representation, promise, or agreement except as stated herein. Some states do not allow exclusion of incidental or consequential damages. As a result, this limitation or exclusion may not apply to you.

This Warranty gives you specific legal rights, and you may also have other rights that vary from state to state.

Please refer to mickeythompsonstires.com for the complete "Mickey Thompson Passenger and Light Truck Limited Warranty" or contact Mickey Thompson's technical support department at 1-800-222-9092 for additional information.

Mickey Thompson Tires shall not be liable for any incidental or consequential damages for any breach of warranty, its liability and the purchaser's exclusive remedy being expressly limited to replacement of defective wheel, as herein provided. Replacement will be handled by an authorized Mickey Thompson Tire Dealer or Mickey Thompson Tire representative.

This warranty gives you specific legal rights. You may also have other rights under applicable laws.

FOR SERVICE ASSISTANCE OR INFORMATION CALL OR WRITE TO:

Mickey Thompson Tires
4651 Prosper Drive
Stow, OH 44224
Phone: (330) 928-9092
Fax: (330) 928-0503

WHEEL WARRANTY

Mickey Thompson Tires warrants to the original purchaser that a new M/T Wheel is free from defects in material and workmanship and agrees to replace a M/T Wheel which fails in normal use and service resulting from defects in material and workmanship for the life of the vehicle for which said wheel was intended and purchased for. Mickey Thompson Tires does not warrant any wheel which has been subject to misuse or abuse in which the following:

(a) Using tires which are oversized according to the standards recommended by the Tire and Rim Association, Inc.;

(b) Loading the wheel beyond the applicable maximum wheel load as specified by Mickey Thompson Tires;

(c) Any type of racing or activity which subjects wheels to the abuse of racing, whether on the road or off;

(d) Inflating beyond the maximum specified on any given tire size as specified by Mickey Thompson Performance

Tires;

(e) Changing or altering the original condition of the wheel or by subjecting it to any processing such as welding or straightening.

WHEEL FINISH WARRANTY


1 Year Finish Warranty
Classic III Black, Sidebiter II, Classic Baja Lock.
All other wheels - No Finish Warranty

THERE IS NO WARRANTY THAT WHEELS ARE MERCHANTABILITY OR SATISFACTORY FOR ANY PARTICULAR PURPOSE NOR IS THERE ANY OTHER WARRANTY EXPRESSED OR IMPLIED EXCEPT AS SET FORTH HEREIN.

ET DRAG[®]

Real world research and development give M/T[®] slicks the edge over competitive brands. Engineered for maximum traction and consistent ET's with superior construction and compounding for nearly every drag race application.

- Multiple compounds and sizes
- Compounded For maximum traction
- Requires little or no burnout
- Engineered for consistent performance

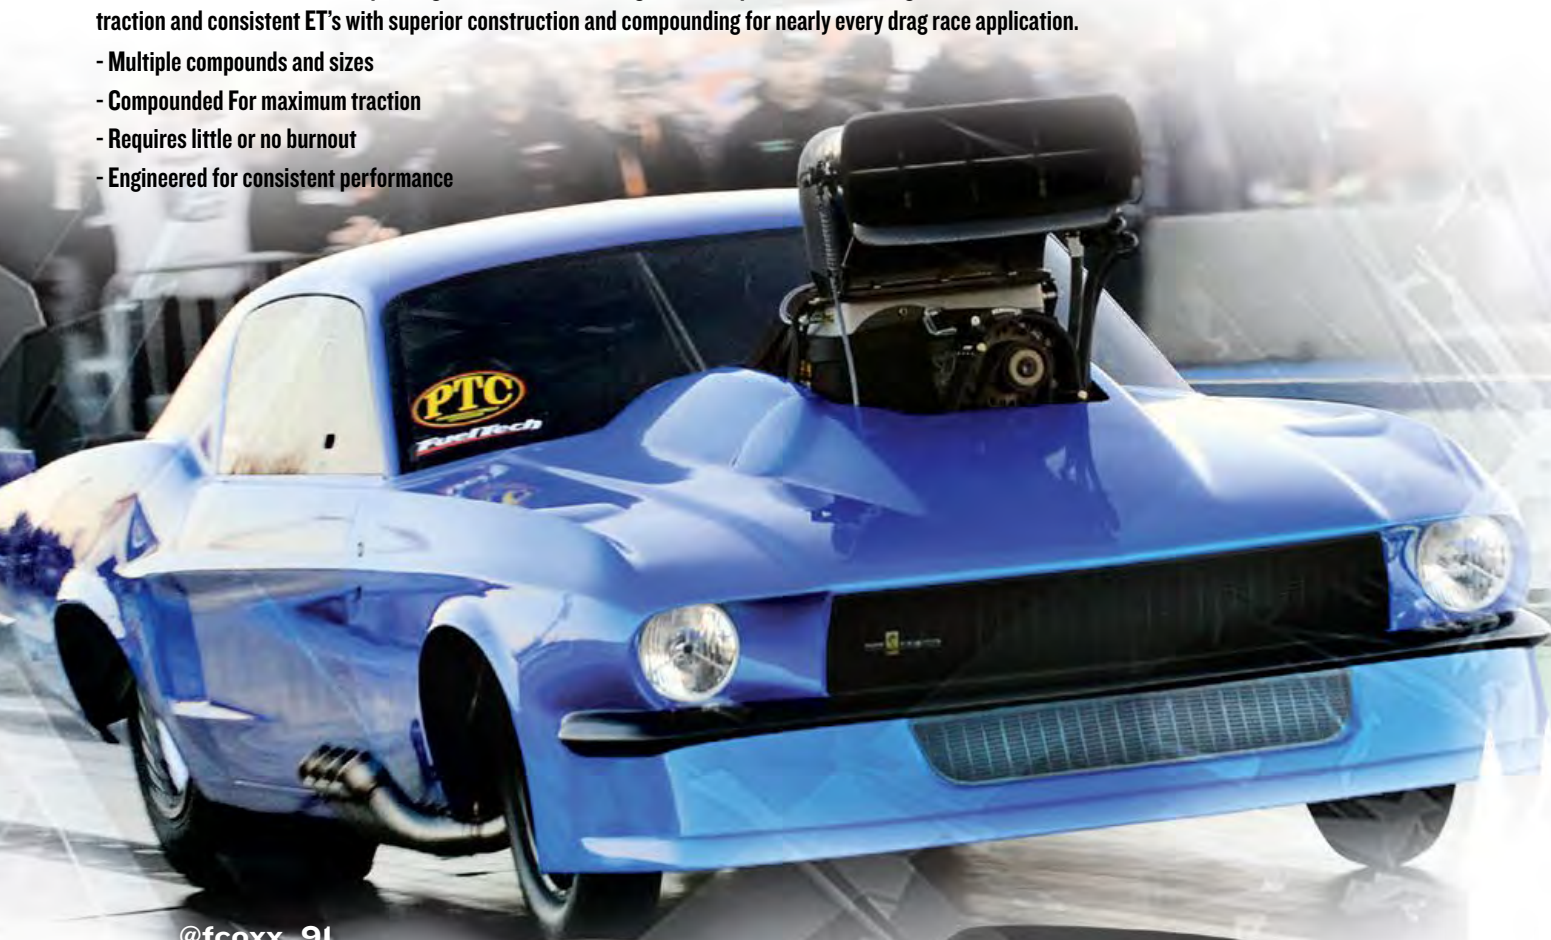

@fcoxx_9l



MATERIAL NUMBER	PART #	TIRE SIZE	MEASURED RIM WIDTH INCHES	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	CIRCUMFERENCE INCHES	COMPOUND	SUGGESTED TUBE	APPROX. WEIGHT LBS.
90000000823	3010	22.0/8.0-13	7.0	22.4	9.2	7.9	70	L8	90000000289	14
90000000829	3014	24.5/8.0-13	7.0	24.5	10.5	7.7	77	L8	90000000289	16
900000028340	3016I	24.5/9.0-13	7.0	24.5	10.9	8.8	77	X8	90000000289	16
900000000836	3019	22.0/8.0-15	7.0	22.4	8.6	7.9	70	L8	-	14
900000000831	3015	24.5/8.0-15	8.0	24.5	9.6	7.7	77	L8	90000000289	17
900000000842	3052	26.0/8.5-15	8.0	25.9	9.9	8.1	81	L8	90000000289	19
900000000843	3053	26.0/10.0-15	10.0	26.0	11.6	9.6	82	L8	90000000289	22
900000000846*	3053S	26.0/10.0-15S	10.0	26.5	11.5	9.8	83	M5	90000000289	24
900000000847	3054	28.0/9.0-15	8.0	27.3	10.8	8.6	86	L8	90000000289	22
900000022010	3054ST	28.0/9.0-15	8.0	27.3	10.8	8.6	86	M5	90000000289	22
900000000848	3055	28.0/10.5-15	10.0	28.1	12.5	10.0	88	M5	90000000289	23
900000000851*	3055S	28.0/10.5-15S	10.0	28.1	12.5	10.0	88	M5	90000000289	24
900000000852	3055W	28.0/10.5-15W	10.0	28.1	13.1	10.9	88	M5	90000000290	26
90000001551	3055I	28.0/10.5-15W	10.0	28.1	13.1	10.9	88	M5	90000000290	27
900000000856	3057	28.0/11.5-15	10.0	28.0	12.9	11.0	88	M5	90000000290	26
900000000853	3056	29.5/9.0-15	8.0	29.3	11.4	8.9	92	L8	90000000289	22
900000000855	3056ST	29.5/9.0-15ST	8.0	29.3	11.4	8.9	92	M5	90000000289	22
900000000860*	3062W	29.5/10.5-15W	10.0	29.6	13.6	11.2	93	M5	90000000290	30
900000000858	3062	29.5/10.5-15	10.0	29.9	13.1	10.2	94	M5	90000000290	25
900000000859*	3062S	29.5/10.5-15S	10.0	29.9	13.2	10.2	94	M5	90000000290	27
900000000861	3064	29.5/11.5-15	10.0	29.9	13.6	11.1	94	M5	90000000290	27
900000000863	3065	29.5/13.5-15	12.0	30.2	16.0	13.1	95	M5	90000000290	29
900000000871	3072	31.0/13.0-15	12.0	31.0	15.7	13.0	97	M5	90000000291	32
900000000869*	3068W	31.0/10.5-15W	10.0	31.3	14.5	10.8	98	M5	90000000290	33
900000000874	3073W	31.25/12.2-15W	12.0	31.5	15.8	13.2	99	L8	90000000291	29
900000022014	3073ST	31.25/12.2-15W	12.0	31.5	15.8	13.2	99	M5	90000000291	32
900000000875	3074	32.0/14.0-15	14.0	31.8	17.2	14.2	100	L8	90000000291	33
900000000877*	3074S	32.0/14.0-15S	14.0	32.2	17.1	14.2	101	L8	90000000291	35
900000000878*	3074ST	32.0/14.0-15ST	14.0	32.2	17.1	14.2	101	M5	90000000291	36
900000000880	3075I	14.5/32.0-15	14.0	33.0	17.4	14.5	104	L8	90000000291	38
900000022013	3077I	32.0/16.0-15S	15.0	32.0	18.5	15.8	101	X8	90000000291	42
900000000870*	3069W	33.0/10.5-15W	10.0	32.9	14.5	11.2	103	M5	90000000291	33
900000028341*	3080	33.0/15.0-15S	14.0	33.6	18.1	14.8	106	X8	90000000291	37
900000000893	3169W	33.0/10.5-16W	15.0	33.0	16.8	11.3	104	M5	90000000291	34
900000000888*	3084S	33.0/16.5-15S	15.0	33.5	20.0	16.7	105	L8	90000000291	41
90000001574*†	3183	33.5/16.5-16	16.0	33.7	20.8	16.5	106	X8	90000000291	41
90000001562*	3190W	34.0/13.5-16W	16.0	34.5	18.3	14.0	109	X5	-	39
90000021546*	3191W	34.0/13.5-16W	16.0	34.5	18.3	14.0	109	X8	-	39
900000000895*	3186	34.5/17.0-16	16.0	35.0	21.0	17.0	110	M5	-	45
90000038344*	3100	34.5/17.0-16	16.0	35.0	21.0	17.0	110	L6	-	45
90000001930*	3195	35.0/15.0-16	16.0	35.2	18.6	14.5	111	X5	-	40
90000036981*	3197	35.0/15.0-16	16.0	35.2	18.6	14.5	111	L6	-	40

† HIGH GROWTH TIRE * STIFF SIDEWALL. ACCEPTABLE PRACTICE FOR RIM WIDTH IS TREAD WIDTH PLUS OR MINUS 1 INCH. SEE PAGE 33 FOR COMPOUND CONSTRUCTION DATA. IMPORTANT: ALL BIAS DRAG DRIVE TIRES MUST BE MATCHED TO BE WITHIN 1/2 INCH ROLL OUT. NOTE: BESIDES BEING REQUIRED FOR AIR RETENTION, M/T TUBES WILL ENHANCE REACTION TIME AND REDUCE SIDEWALL SHOCK AND DEFLECTION WHEN LAUNCHING. WARNING: DO NOT USE ON DYNO.



ET DRAG[®] PRO DRAG RADIAL

M/T[®] Pro Drag Radials are the fastest Drag tires on the strip! The radial design allows for less rolling resistance for better ET's. Radial slicks will give you the edge over the competition!

- Radial Construction for Less Rolling Resistance
- Zero Growth for Predictable Gear Ratios
- Compounded For Maximum Traction
- Works best with Auto Trans Applications

MATERIAL NUMBER	PART #	TIRE SIZE	MEASURED RIM WIDTH INCHES	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	CIRCUMFERENCE INCHES	COMPOUND	SUGGESTED TUBE	APPROX. WEIGHT LBS.
90000024091	3052R	26.0/8.5R15	8.0	26.4	9.9	8.5	83	RI	TUBELESS	24
90000023502	3058R	29.5/9.0R15	10.0	29.5	11.2	8.5	93	RI	TUBELESS	24
90000024092	3062R	29.5/10.5R15	10.0	30.0	12.7	10.2	94	RI	TUBELESS	31
90000038315	3060R	30.0/9.0R15	10.0	29.7	12.5	9.0	93	RI	TUBELESS	23
90000000873	3073R	31.25/12.2R15W	14.0	31.9	16.3	13.5	100	RI	TUBELESS	30
90000000876	3074R	32.0/14.0R15	14.0	32.3	17.4	14.0	101	RI	TUBELESS	32

HIGHLIGHTED YELLOW ROW INDICATES NEW SIZES

EXCELLENT FOR HEADS-UP/CLASS RACING. ACCEPTABLE PRACTICE FOR RIM WIDTH IS TREAD WIDTH PLUS OR MINUS 1 INCH. SEE PAGE 33 FOR COMPOUND CONSTRUCTION DATA. **WARNING: NEVER USE RIM SCREWS ON RADIAL DRAG TIRES. DO NOT USE ON DYNO.**



PRO BRACKET RADIAL

Pro Bracket Radial from Mickey Thompson is a fast, consistent, reliable, affordable radial for the weekend Sportsman racer.

- Low rolling resistance allowing them to be quicker and faster than the bias ply counterparts
- The rollouts are always the same – no need to “match” tires
- Consistent performance designed for bracket racing

MATERIAL NUMBER	PART #	TIRE SIZE	MEASURED RIM WIDTH INCHES	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	CIRCUMFERENCE INCHES	COMPOUND	SUGGESTED TUBE	APPROX. WEIGHT LBS.
90000024496	3353R	26.0/10.0R15	10.0	26.2	11.6	9.9	82	X5	TUBELESS	26
90000024497	3354R	28.0/9.0R15	8.0	28.0	10.7	9.0	88	X5	TUBELESS	26
90000024498	3355R	28.0/10.5R15	10.0	28.0	12.2	10.2	88	X5	TUBELESS	29
90000024499	3362R	29.5/10.5R15	10.0	30.0	12.5	10.2	94	X5	TUBELESS	31
90000026342	3373R	31.0/13.5R15	14.0	31.9	16.3	13.5	100	X5	TUBELESS	41
90000026341	3374R	32.0/14.0R15	14.0	32.6	16.5	14.1	102	X5	TUBELESS	42

ACCEPTABLE PRACTICE FOR RIM WIDTH IS TREAD WIDTH PLUS OR MINUS 1 INCH. SEE PAGE 33 FOR COMPOUND CONSTRUCTION DATA. **WARNING: NEVER USE RIM SCREWS ON RADIAL DRAG TIRES. DO NOT USE ON DYNO.**



@speedkore01



ET STREET® R

A drag tire that can be driven on the street. ET Street R from Mickey Thompson is a D.O.T. street legal drag tire based on the legendary ET Street Radial Pro construction. The proven R2 compound provides quick/consistent traction at the strip with little burnout required.

- D.O.T. approved for street use
- Minimal Tread Void provides excellent tread-contact
- Tubeless construction
- UTQG 000 C C

MATERIAL NUMBER	PART #	TIRE SIZE	EQUIV. SIZE	(MEAS. RIM WD.) APPD. RIM WIDTH INCHES	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	CIRC. INCHES	COMPOUND	APPROX. WEIGHT LBS.
90000028457	3540	P205/50R15	23X8.50R15	(6.5) 5.5 - 7.5	23.2	8.3	7.4	73	R2	19
90000024650	3550	P225/50R15	24X9.50R15	(7.0) 6.0 - 8.0	24.1	9.1	7.8	76	R2	21
90000024641	3552	P275/50R15	26X11.50R15	(8.5) 7.5 - 9.5	26.3	11.2	10.1	83	R2	28
90000024642	3553	P255/60R15	27X10.50R15	(7.5) 7.0 - 9.0	27.5	10.3	8.8	87	R2	26
90000028458	3559	P275/60R15	28X11.50R15	(8.0) 7.5 - 9.5	28.2	11.1	9.5	89	R2	30
90000024644	3555	P325/50R15	28X13.50R15	(10.0) 9.0 - 11.5	28.3	13.0	11.3	89	R2	33
90000028459	3558	P295/65R15	30X12.50R15	(8.5) 8.0 - 10.5	30.2	12.1	10.5	95	R2	34
90000031236	3563	P315/60R15	30X13.50R15	(9.5) 8.5 - 11.0	30.1	13.3	11.7	95	R2	37
90000031238	3564	31X16.50R15LT	-	(12.0) 11.0 - 14.0	32.0	16.3	13.4	100	R2	46
90000024648	3570	P245/45R17	26X9.50R17	(8.0) 7.5 - 9.0	25.7	9.5	8.8	81	R2	25
90000028456	3573	P275/40R17	26X11.50R17	(9.5) 9.0 - 11.0	26.1	10.9	10.2	82	R2	27
90000024649	3571	P315/35R17	26X12.50R17	(11.0) 10.5 - 12.5	25.9	12.4	11.3	81	R2	30
90000024660	3572	P305/45R17	28X12.50R17	(10.0) 9.5 - 11.5	28.1	11.7	10.5	88	R2	31
90000031237	3576	P315/50R17	30X13.50R17	(10.0*) 8.5 - 11.0	29.4	12.7	11.2	92	R2	35
90000028455	3581	P325/35R18	27X13.50R18	(11.0) 10.0 - 12.0	27.0	13.1	12.1	85	R2	33
90000024661	3580	P305/45R18	29X12.50R18	(10.0) 9.5 - 11.5	29.0	11.8	10.7	91	R2	32

SEE PAGE 33 FOR COMPOUND CONSTRUCTION DATA. **WARNING: NEVER USE RIM SCREWS ON RADIAL DRAG TIRES. DO NOT USE ON DYNO.**
CAUTION: IT IS NOT RECOMMENDED THAT RADIAL AND NON-RADIAL TIRES BE MIXED ON THE SAME VEHICLE.



ET STREET® R BIAS

ET Street R bias ply from Mickey Thompson is a D.O.T street legal drag tire with proven race compounds and incredible traction.

- D.O.T. approved for street use
- Bias ply construction provides enhanced traction for clutch applications
- Minimal tread void provides excellent contact

MATERIAL NUMBER	PART #	TIRE SIZE	(MEAS. RIM WD.) APPD. RIM WIDTH INCHES	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	CIRCUMFERENCE INCHES	COMPOUND	SUGGESTED TUBE	APPROX. WEIGHT LBS.
90000024651	3551	26X10.50-15LT	(8.0) 7.0 - 9.0	26.3	10.4	8.7	83	M5	90000000289	20
90000024643	3554	28X11.50-15LT	(8.0) 8.0 - 10.0	28.2	11.1	8.8	89	M5	90000000289	22
90000031239	3561	28X12.50-15LT	(10.0) 9.0 - 11.0	28	12.6	10.1	88	M5	90000000290	24
90000024645	3556	31X16.50-15LT	(12.0) 11.0 - 14.0	32	16	13.4	100	M5	90000000291	34
90000024646	3557	32X17.50-15LT	(14.0) 12.0 - 15.0	32.2	17.9	14.4	101	M5	90000000291	35
90000028490	3574	28X11.50-17LT	(9.0) 8.5 - 10.5	28.5	11.1	9.5	90	M5	-	27

PROPER SIZE AND TYPE OF TUBE MUST BE USED WITH ALL DOT TUBE TYPE TIRES. SEE PAGE 33 FOR COMPOUND CONSTRUCTION DATA.
CAUTION: IT IS NOT RECOMMENDED THAT RADIAL AND NON-RADIAL TIRES BE MIXED ON THE SAME VEHICLE.
IMPORTANT: ALL BIAS ET STREET R TIRES MUST BE MATCHED TO BE WITHIN 1/2 INCH ROLL OUT. DO NOT USE ON DYNO.



ET STREET® S/S®

A D.O.T. approved STREET tire which provides excellent traction at the STRIP.

- Proven polyester-ply, steel belted, tubeless radial construction provides strength & durability for excellent ride control on the street
- Proven R2 compound provides quick/consistent traction at the STRIP with little burnout required
- Minimal tread void for excellent dry traction, strategically placed to aid in hydroplane resistance
- UTQG 000 C C

MATERIAL NUMBER	PART #	TIRE SIZE	EQUIV. SIZE	LOAD RANGE	(MEAS. RIM WD.) APPD. RIM WIDTH INCHES	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	CIRC. INCHES	COMPOUND	APPROX. WEIGHT LBS.
90000024528	3450	P235/60R15	26X9.50R15	STD	(7.0) 6.5 - 8.5	26.2	9.4	8.3	82	R2	29
90000024550	3451	P275/50R15	26X11.50R15	STD	(8.5) 7.5 - 9.5	26.4	11.1	10.2	83	R2	31
90000024552	3452	P255/60R15	27X10.50R15	STD	(7.5) 7.0 - 9.0	27.3	10.1	8.8	86	R2	31
90000024554	3453	P275/60R15	28X11.50R15	STD	(8.0) 7.5 - 9.5	28.2	11.1	9.3	89	R2	32
90000024555	3454	P295/55R15	28X12.50R15	STD	(9.5) 8.0 - 10.5	28.0	11.9	10.6	88	R2	34
90000031341	3456	29X15.00R15LT	-	B	(12.0) 10.0 - 13.0	29.0	14.8	13.0	91	R2	43
90000031343	3458	29X18.00R15LT	-	B	(14.0) 14.0 - 16.0	29.0	17.3	15.8	91	R2	46
90000024556	3455	P295/65R15	30X12.50R15	STD	(8.5) 8.0 - 10.5	30.3	12.0	10.6	95	R2	41
90000031342	3457	31X18.00R15LT	-	B	(14.0) 14.0 - 16.0	31.2	17.7	15.7	98	R2	50
90000024557	3460	P255/50R16	26X10.50R16	STD	(8.0) 7.0 - 9.0	26.4	10.4	9.4	83	R2	29
90000024558	3470	P275/40R17	26X11.50R17	STD	(9.5) 9.0 - 11.0	26.0	10.8	10.3	82	R2	31
90000024559	3471	P315/35R17	26X12.50R17	STD	(11.0) 10.5 - 12.5	25.9	12.3	11.4	81	R2	32
90000028441	3472	P305/45R17	28X12.50R17	STD	(10.0) 9.5 - 11.5	27.9	11.9	10.6	88	R2	36
90000024570	3480	P305/35R18	26X12.50R18	LL	(11.0) 10.0 - 12.0	26.6	12.2	11.2	84	R2	33
90000024571	3481	P285/40R18	27X11.50R18	LL	(10.0) 9.5 - 11.0	26.9	11.3	10.5	85	R2	29
90000028443	3484	P275/45R18	28X11.50R18	STD	(9.0) 8.5 - 10.5	27.8	11.3	10.0	87	R2	32
90000024572	3482	P305/40R18	28X12.50R18	STD	(11.0) 10.0 - 12.0	28.0	12.2	11.1	88	R2	33
90000024573	3483	P345/35R18	28X13.50R18	LL	(12.0) 11.5 - 13.5	27.8	13.5	12.4	87	R2	38
90000028442	3492	P285/35R19	27X11.50R19	STD	(10.0) 9.5 - 11.0	27.0	11.6	11.2	85	R2	32
90000024575	3491	P305/35R19	27X12.50R19	STD	(11.0) 10.0 - 12.0	27.2	12.9	11.5	86	R2	38
90000024574	3490	P325/30R19	27X13.50R19	LL	(11.5) 11.0 - 12.0	27.0	12.9	12.0	85	R2	36
90000024577	3401	P275/40R20	29X11.50R20	XL	(9.5) 9.0 - 11.0	29.0	10.8	9.9	91	R2	33
90000024578	3402	P305/35R20	29X12.50R20	STD	(11.0) 10.0 - 12.0	28.7	12.0	11.0	90	R2	34

SEE PAGE 33 FOR COMPOUND CONSTRUCTION DATA. **WARNING: NEVER USE RIM SCREWS ON RADIAL DRAG TIRES. DO NOT USE ON DYNO.**
CAUTION: IT IS NOT RECOMMENDED THAT RADIAL AND NON-RADIAL TIRES BE MIXED ON THE SAME VEHICLE.



ET STREET® RADIAL PRO

Purpose built race tire for classes requiring a D.O.T. approved P275/60R15 (Material # 90000001536) or P315/60R15 (Material # 90000024662) size tire.

- Next generation construction designed to take more power for better launches
- Reduced tread pattern for maximum traction

MATERIAL NUMBER	PART #	TIRE SIZE	EQUIV. SIZE	MEASURED RIM WIDTH INCHES	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	CIRCUMFERENCE INCHES	COMPOUND	APPROX. WEIGHT LBS.
90000001536	3754X	P275/60R15	28X11.50R15	8.0	28.2	11.4	9.8	89	R2	32
90000024662	3763X	P315/60R15	30X13.50R15	9.5	30.3	13.2	11.5	95	R2	39

SEE PAGE 33 FOR COMPOUND CONSTRUCTION DATA.
WARNING: RACE ONLY. NOT FOR STREET USE. NEVER USE RIM SCREWS ON RADIAL DRAG TIRES. DO NOT USE ON DYNO.
CAUTION: IT IS NOT RECOMMENDED THAT RADIAL AND NON-RADIAL TIRES BE MIXED ON THE SAME VEHICLE.



ET FRONT™

Complete line of front tires with applications for cars, dragsters, and land speed racers. Compliments our ET Drag® drive tires for a complete race tire package.

- Ultra-lightweight design reduces rolling resistance
- Acceptable for high speed use*
- Tubeless construction
- Available in many popular sizes

MATERIAL NUMBER	PART #	TIRE SIZE	(MEAS. RIM WD.) APPD. RIM WD. INCHES	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	CIRCUMFERENCE INCHES	APPROX. WEIGHT LBS.
90000000818	3005	22.5/4.5-15	(4.0) 3.5 - 5.0	22.5	5.1	4.1	71	11
90000001310	30061	24.0/4.5-15	(4.0) 3.5 - 4.0	24.2	5.8	4.3	76	11
90000000815	3001	25.0/4.5-15	(4.0) 3.5 - 4.0	25.0	6.5	4.5	79	11
90000026533	30071	26.0/4.0-15	(3.5) 3.5 - 4.0	26.1	6.2	4.5	82	12
90000026534	30091	27.5/4.0-15	(3.5) 3.5 - 4.0	27.3	6.8	4.6	86	12
90000000816	3002	28.0/4.5-15	(4.0) 3.5 - 4.5	28.0	7.2	5.1	88	13
90000000821	3008	29.0/4.5-15	(4.0) 3.5 - 5.0	28.7	7.3	4.5	90	12
90000036273	30043	22.0/2.5-17	(2.5) 2.5 - 2.5	22.0	2.7	1.5	69	4
90000026535	30073	26.0/4.0-17	(3.5) 3.5 - 4.0	26.5	5.4	4.5	83	11
90000026536	30093	27.5/4.0-17	(3.5) 3.5 - 4.0	27.8	5.8	4.5	87	12

*MATERIAL #90000000821 & #90000000816 NOT ACCEPTABLE FOR LAND SPEED RECORD USE.



ET JR.®

Number one in Jr. Drag Racing Tires. M/T® slicks have the edge over competing brands! Engineered for maximum traction and consistent ET's.

- A Proven Jr. drag winner
- Compounded For maximum traction
- Requires little or no burnout
- Engineered for consistent performance

MATERIAL NUMBER	PART #	TIRE SIZE	MEASURED RIM WIDTH INCHES	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	CIRCUMFERENCE INCHES	COMPOUND	APPROX. WEIGHT LBS.
90000000943	3625	18.0/8.0-8	8.0	18.0	10.5	7.3	57	L2	6
90000000944	3627	18.0/8.5-8	8.0	18.1	10.8	8.1	57	L2	6
90000000947	3645	19.0/8.0-10	8.0	19.5	9.5	7.2	61	L2	8

ACCEPTABLE PRACTICE FOR RIM WIDTH IS TREAD WIDTH PLUS OR MINUS 1 INCH. IMPORTANT: ALL BIAS DRAG DRIVE TIRES MUST BE MATCHED TO BE WITHIN 1/2 INCH ROLL OUT. SEE PAGE 33 FOR COMPOUND CONSTRUCTION DATA. **WARNING: RACE ONLY. NOT FOR STREET USE.**




ET DRAG® MOTORCYCLE

This version of our ET Drag tire is consistently setting records and winning races. Mickey Thompson is number one in Motorcycle Drag Racing and racers ask for M/T Motorcycle Drag Tires by name.

- A proven drag strip winner
- Compounded for maximum traction
- Requires little or no burnout
- Engineered for consistent performance

MATERIAL NUMBER	PART #	TIRE SIZE	MEASURED RIM WIDTH INCHES	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	CIRCUMFERENCE INCHES	COMPOUND	APPROX. WEIGHT LBS.
90000000845	3053M	26.0/10.0-15M	9.0	26.0	11.0	9.8	82	L7	19
90000000872	3073M	31.0/14.0-15M	13.0	31.0	16.8	13.6	97	L7	34
90000000892	3158M	27.0/10.0-16M	9.0	27.0	11.6	10.0	85	L7	20
90000000905	3221	26.0/7.0-17	6.5	25.7	7.4	6.5	81	M5	13
90000000903	3210	2.50/2.75-18	3.0	23.5	3.1	1.7	74	NA	6
90000000904	3220	25.0/5.5-18	5.0	25.8	6.1	5.2	81	L7	11
90000000906	3222	25.0/7.0-18	6.5	25.9	7.2	6.6	81	L7	12

SEE PAGE 33 FOR COMPOUND CONSTRUCTION DATA.
WARNING: RACE ONLY. NOT FOR STREET USE. WARNING: 17-INCH AND 18-INCH MOTORCYCLE TIRES SHOULD NEVER BE MOUNTED ON AUTOMOTIVE RIMS. SERIOUS INJURY OR DEATH CAN OCCUR IF MOTORCYCLE TIRES ARE MOUNTED ON AUTOMOTIVE RIMS OR VICE VERSA.

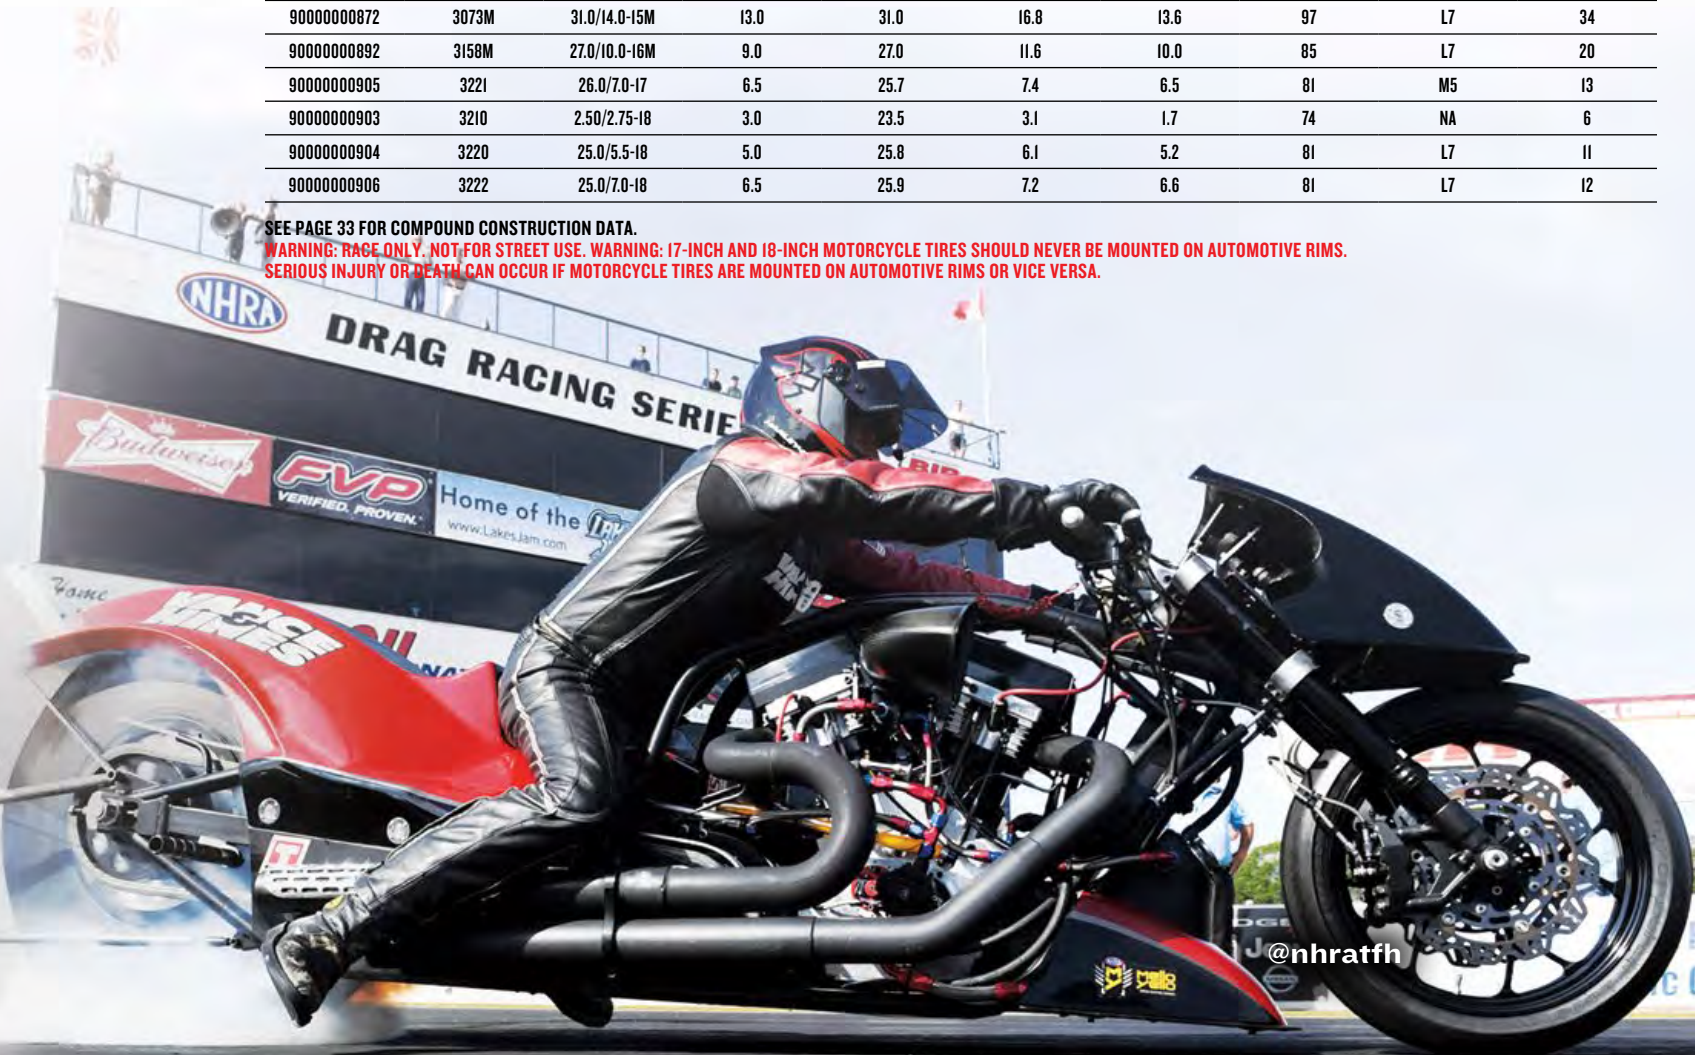

@nhratfh

M/T[®] NATURAL RUBBER TUBES

Made Specifically For High Performance Racing Applications. 100% natural rubber tubes with an aircraft style removable valve stem that clamps to the wheel. Extremely light weight and durable, these tubes are a must for racing applications. Natural rubber is far superior to other materials because of its ability to conform to sidewall distortion and its resistance to deterioration due to many heat cycles.

- 100% natural rubber
- Aircraft-Type removable valve stem
- Valve clamps to wheel
- Extremely lightweight, durable

MATERIAL NUMBER	PART #	SIZE	APPROX. WEIGHT LBS.	DESCRIPTION
90000000289	9553	9.50-15/16	4.1	24.5" To 28" Diameter with 8.0" To 10.5" tread
90000000290	9555	11.50-15	5.6	28" To 31" Diameter with 10.5" To 11.5" tread
90000000291	9558	15.00-15/16	8.1	31" To 33.5" Diameter with 12.0" To 17.0" tread

NOTE: BESIDES BEING REQUIRED FOR AIR RETENTION, M/T[®] TUBES WILL ENHANCE THE REACTION TIME, INCREASE STIFFNESS AND REDUCE SIDEWALL SHOCK AND DEFLECTION WHEN LAUNCHING.



COMPOUND CONSTRUCTION

M/T[®] tires are compounded by size and application. The following points are general application suggestions. Mickey Thompson[®] is not responsible for misapplications. The catalog number suffix indicates a construction, size or compound enhancement for particular applications.

MEDIUM						SOFT		
X5	M5	L6	R2	RI	X8	L8	L7	L2

To identify the compound of your current M/T[®] ET Drag tires look at the serial number on the sidewall of the tire.

EXAMPLE: C Y I J **M 5** F J 0 7 2 0
Compound Code

DRAG TIRE COMPOUNDS

- X5** Cooler running version of M5
- M5** Good compound for general use
- L6** Good for high horsepower - Boosted applications
- R2** Special Compound for ET Street S/S, ET Street R & ET Street Radial Pro
- RI** Special Compound for ET Drag Radial
- X8** Cooler running version of L8
- L8** Good compound for general use
- L7** For Motorcycles
- L2** For Jr. Dragsters

DRAG TIRE CONSTRUCTION

- ST** Suggested for manual transmissions (medium compound)
- W** Extra tread width (please note actual tread and section width on spec sheet)
- S** Stiff sidewall construction, aids in quicker reaction time due to less tire distortion
Also good in high horsepower applications and for heavy cars (Over 3,000 lbs)
- R** Radial Construction



STREET COMP™

The Mickey Thompson Street Comp tire is an ultra high performance tire designed for the street. Providing incredible traction, crisp handling, and high speed cornering ability, the Street Comp also features the outstanding appearance you'd expect from Mickey Thompson. Compounded for traction and responsive handling in both dry and wet conditions, the Street Comp is the perfect tire for your late model American muscle car or Pro Touring application.

- Asymmetric tread design
- Superior wet and dry performance
- Crisp and tight steering response
- UTQG 300 AA A
- Smooth easy to clean sidewalls
- Lightweight construction

MATERIAL NUMBER	PART #	TIRE SIZE	LOAD RANGE	SERVICE DESC.	(MEAS. RIM WD.) APPD. RIM WD. INCHES	MAX. INFL. PSI	MAX. LOAD LBS.	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
90000001600	6275	275/40R17	STD	98W	(9.5) 9.0 - 11.0	51	1,653	25.6	10.9	9.9	10.0	29
90000001579	6273	245/45R17	STD	95Y	(8.0) 7.5 - 9.0	51	1,521	25.6	9.5	8.6	10.0	27
90000020061	6278	315/35R17	STD	102W	(11.0) 10.5 - 12.5	51	1,874	25.6	12.5	11.2	10.0	32
90000001605	6284	245/40R18	XL	97Y	(8.5) 8.0 - 9.5	50	1,609	25.7	9.8	8.8	10.0	27
90000022370	6289	295/35R18	STD	99Y	(10.5) 10.0 - 11.5	51	1,709	26.1	11.9	10.1	10.0	32
90000001620	6288	275/40R18	STD	99Y	(9.5) 9.0 - 11.0	51	1,709	26.6	10.9	9.9	10.0	31
90000001609	6286	255/45R18	XL	103W	(8.5) 8.0 - 10.0	50	1,929	27.1	10.1	9.1	10.0	30
90000001622	6295	255/40R19	XL	100Y	(9.0) 8.5 - 10.0	50	1,764	27.0	10.2	9.3	10.0	29
90000001623	6297	285/35R19	STD	99Y	(10.0) 9.5 - 11.0	51	1,709	26.9	11.3	10.1	10.0	30
90000001615	6223	255/35R20	XL	97W	(9.0) 8.5 - 10.0	50	1,609	27.0	10.2	9.1	10.0	29
90000001616	6226	275/35R20	XL	102W	(9.5) 9.0 - 11.0	50	1,874	27.6	10.7	9.7	10.0	31
90000001617	6221	245/45R20	XL	103Y	(8.0) 7.5 - 9.0	50	1,929	28.7	9.5	8.6	10.0	31
90000001618	6227	275/40R20	XL	106Y	(9.5) 9.0 - 11.0	50	2,094	28.6	10.9	9.9	10.0	34
90000020062	6228	305/35R20	XL	107Y	(11.0) 10.0 - 12.0	50	2,149	28.4	12.3	10.6	10.0	35



SPORTSMAN S/T™

Mickey Thompson's Sportsman S/T Radial is designed for muscle car owners demanding performance, quality and styling. Raised white letters, or black sidewall out, this all season performance tire will give your classic muscle car a wide, low profile look along with the great handling and performance that your car deserves.

- Raised white letters / stylized blackwall
- Popular sizes for muscle cars
- Radial construction for high mileage and a smooth ride
- Flat tread profile for improved handling and wear
- UTQG 440 A B (440 A C for Material 90000000185)

MATERIAL NUMBER	PART #	TIRE SIZE	SERVICE DESC.	(MEAS. RIM WD.) APPD. RIM WD. INCHES	MAX. INFL. PSI	MAX. LOAD LBS.	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
90000000181	6026	P235/60R15	98T	(7.0) 6.5 - 8.5	44	1,642	26.1	9.2	7.6	10.5	26
90000000182	6027	P245/60R15	100T	(7.0) 7.0 - 8.5	44	1,753	26.6	9.5	8.0	10.5	27
90000000178	6023	P215/70R15	97T	(6.5) 5.5 - 7.0	44	1,620	26.7	8.7	7.0	10.5	26
90000000185	6031	P295/50R15	105S	(9.5) 8.0 - 10.0	44	2,061	26.8	12.2	10.1	10.5	32
90000000183	6028	P255/60R15	102T	(7.5) 7.0 - 9.0	44	1,885	27.0	10.2	8.2	10.5	27
90000000180	6025	P225/70R15	100T	(6.5) 6.0 - 7.5	44	1,753	27.4	9.1	7.2	10.5	26
90000000184	6030	P275/60R15	107T	(8.0) 7.5 - 9.5	44	2,149	28.1	10.7	8.9	10.5	31



@stockishzll



SPORTSMAN S/R™

This modern day version of our classic Sportsman tire features radial construction and a unique flamed tread pattern. Extra wide rears and matching fronts make this tire a must for any street rod or street machine builder!

- Radial construction for high mileage and smooth ride
- Unique “flamed” tread pattern that provides improved wet traction
- Custom sizes for street rods and muscle cars
- Available for 15, 17, 18 and 20-inch wheel diameters
- Matching front “skinny’s” for staggered fitments

MATERIAL NUMBER	PART #	TIRE SIZE	SERVICE DESC.	(MEAS. RIM WD.) APPD. RIM WD. INCHES	MAX. INFL. PSI	MAX. LOAD LBS.	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	APPROX. WEIGHT LBS.
90000000229	6651	24X5.00R15LT	76H	(4.0) 3.5 - 4.5	50	900	24.0	5.8	4.5	8.0	15
90000000230	6652	26X6.00R15LT	80H	(4.0) 3.5 - 5.0	35	990	26.0	6.5	5.7	8.0	20
90000000228	6650	26X8.00R15LT	80H	(6.0) 5.0 - 7.0	35	1,000	26.1	8.5	7.0	8.0	21
90000000231	6653	26X10.00R15LT	83H	(8.0) 7.0 - 9.0	35	1,075	26.1	10.3	8.8	8.0	23
90000000232	6654	26X12.00R15LT	85H	(10.0) 8.0 - 10.0	35	1,150	26.1	12.0	10.6	8.0	26
90000034900	6658	27X6.00R15LT	-	(5.0) 3.5 - 5.0	35	990	27.0	6.4	5.4	8.0	19
90000034901	6659	27X8.00R15LT	-	(6.0) 5.0 - 7.0	35	1,105	27.1	8.2	6.7	8.0	23
90000020407	6678	28X6.00R15LT	-	(4.5) 3.5 - 5.0	35	1,040	28.0	6.9	4.8	8.0	21
90000000223	6640	28X10.00R15LT	90H	(8.0) 7.0 - 8.5	35	1,335	28.0	10.3	8.7	8.0	27
90000000224	6641	28X12.00R15LT	93H	(10.0) 8.5 - 10.0	35	1,435	28.0	12.1	10.4	8.0	31
90000000225	6642	29X15.00R15LT	98H	(12.0) 10.0 - 13.0	25	1,325	29.0	15.0	13.0	8.0	42
90000000233	6655	29X18.00R15LT	94H	(14.0) 14.0 - 16.0	25	1,500	29.0	17.3	15.8	8.0	49
90000000226	6643	30X12.00R15LT	99H	(10.0) 8.5 - 10.0	35	1,740	30.0	12.6	10.2	8.0	36
90000000227	6644	31X16.00R15LT	105H	(12.0) 12.0 - 14.0	35	2,080	31.0	16.0	13.9	8.0	47
90000000234	6656	31X18.00R15LT	99H	(14.0) 14.0 - 16.0	25	1,720	31.0	17.9	15.7	8.0	50
90000000235	6657	33X22.00R15LT	107H	(15.0) 15.0 - 18.0	25	2,200	32.0	20.0	17.8	8.0	59
90000020379	6677	26X6.00R17LT	-	(4.5) 4.0 - 5.0	50	1,025	26.1	6.3	5.7	8.0	18
90000034902	6673	27X6.00R17LT	-	(4.5) 4.0 - 5.0	50	1,100	27.0	6.2	5.4	8.0	21
90000034920	6674	27X8.00R17LT	-	(6.0) 5.5 - 7.0	50	1,215	26.9	7.9	6.7	8.0	24
90000020408	6679	28X6.00R17LT	-	(4.5) 4.0 - 5.0	50	1,175	28.0	6.6	5.7	8.0	25
90000000241	6682	26X6.00R18LT	79H	(5.0) 4.5 - 5.5	50	980	26.0	6.3	5.7	8.0	18
90000000239	6680	26X8.00R18LT	78H	(6.0) 5.5 - 7.0	50	960	26.2	7.7	7.2	8.0	21
90000032430*	6688	28X6.00R18LT	-	(4.5) 4.0 - 5.0	95	1,650	28.0	6.6	5.7	8.0	25
90000000237	6671	28X12.00R18LT	94H	(10.0) 9.0 - 10.0	50	1,480	28.0	11.6	10.6	8.0	33
90000038822	6622	27X7.00R20LT		(5.5) 5.0 - 6.0	65	1,020	27.0	6.5	5.5	8.0	21
90000000218	6620	29X15.00R20LT	93H	(14.0) 13.0 - 14.0	50	1,460	29.0	14.7	13.0	8.0	41
90000000220	6625	29X18.00R20LT	80H	(16.0) 15.0 - 16.0	35	1,000	29.0	17.2	15.5	8.0	46
90000000221	6626	31X18.00R20LT	94H	(16.0) 15.0 - 16.0	25	1,500	31.1	17.3	15.7	8.0	50
90000000222	6627	33X22.00R20LT	97H	(17.0) 16.0 - 18.0	25	1,650	32.0	18.9	17.8	8.0	58

HIGHLIGHTED YELLOW ROW INDICATES NEW SIZES

*LOAD RANGE F. SPORTSMAN S/R TIRES CAN BE USED WITH THE PRO DRAG RADIAL, PRO BRACKET RADIAL, ET STREET RADIAL PRO, ET STREET R (RADIAL SIZES) & ET STREET S/S TIRES. CAUTION: IT IS NOT RECOMMENDED THAT RADIAL AND NON-RADIAL TIRES BE MIXED ON THE SAME VEHICLE.



SPORTSMAN PRO®

The Mickey Thompson Sportsman Pro has a street tire tread and a drag tire compound for serious street and vintage car racers. A high performance street legal tire for hot rods, t-buckets and muscle cars that have shortened rear ends and “tubbed” fender wells.

- Widest D.O.T. approved street legal tire
- Wrinkle wall sidewall / Bias ply construction
- Drag compound
- Selected by Hot Rod Magazine for their “Speed Parts Hall of Fame”

MATERIAL NUMBER	PART #	TIRE SIZE	(MEAS. RIM WD.) APPD. RIM WD. INCHES	MAX. INFL. PSI	MAX. LOAD LBS.	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	SUGGESTED TUBE	APPROX. WEIGHT LBS.
90000000205	6542	26X10.50-15LT	(8.0) 7.0 - 10.0	30	1,090	26.0	10.4	8.0	8.0	90000000289	23
90000000207	6546	28X10.50-15LT	(8.0) 7.0 - 9.0	30	1,355	28.0	11.2	8.3	8.0	90000000289	23
90000000208	6548	28X12.50-15LT	(10.0) 8.0 - 11.0	30	1,145	28.0	13.1	10.4	8.0	90000000289	26
90000000209	6557	29X12.50-15LT	(10.0) 8.0 - 11.0	30	1,645	29.0	13.0	10.0	8.0	90000000290	27
90000000210	6558	29X15.50-15LT	(12.0) 10.0 - 13.0	20	1,425	29.0	15.3	12.7	8.0	90000000291	32
90000000211	6559	29X18.50-15LT	(14.0) 14.0 - 16.0	20	1,515	29.0	17.6	15.5	8.0	90000000291	37
90000000212	6560	31X16.50-15LT	(12.0) 12.0 - 14.0	20	1,670	31.0	15.7	12.2	8.0	90000000291	34
90000000213	6562	31X18.50-15LT	(14.0) 14.0 - 16.0	20	1,720	31.0	17.5	14.3	8.0	90000000291	37
90000000214	6564	33X19.50-15LT	(14.0) 14.0 - 16.0	20	2,050	32.0	18.0	14.5	8.0	90000000291	39
90000000215	6565	33X21.50-15LT	(15.0) 15.0 - 18.0	20	2,140	32.0	19.6	16.6	8.0	90000000291	44

PROPER SIZE AND TYPE OF TUBE MUST BE USED WITH ALL DOT TUBE TYPE TIRES. SEE PAGE 32 FOR TUBE INFORMATION.
CAUTION: IT IS NOT RECOMMENDED THAT RADIAL AND NON-RADIAL TIRES BE MIXED ON THE SAME VEHICLE. DO NOT USE ON DYNO.



SPORTSMAN FRONT™

The Mickey Thompson Sportsman Front is a street legal high performance tire for hot rods, t-buckets and muscle cars. The Sportsman Front is the matching front tire for the Mickey Thompson Sportsman Pro.

- D.O.T. approved street legal tire
- Suitable Drag front
- Bias-ply construction
- Tubeless construction

MATERIAL NUMBER	PART #	TIRE SIZE	(MEAS. RIM WD.) APPD. RIM WD. INCHES	MAX. INFL. PSI	MAX. LOAD LBS	OVERALL DIAMETER INCHES	SECTION WIDTH INCHES	TREAD WIDTH INCHES	TREAD DEPTH 32NDS	SUGGESTED TUBE	APPROX. WEIGHT LBS.
90000000593	1572	26X7.50-15LT	(4.0) 3.5 - 6.5	30	1,000	26.0	6.3	4.8	8.0	TUBELESS	16
90000000594	1573	26X7.50-15LT	(4.0) 3.5 - 6.5	60	1,450	26.0	6.3	4.8	8.0	TUBELESS	19
90000000596	1575	26X8.50-15LT	(6.0) 4.5 - 7.0	30	1,000	27.0	8.3	6.7	8.0	TUBELESS	22
90000000595	1574	28X7.50-15LT	(4.0) 3.5 - 6.5	30	1,100	28.0	6.9	5.5	8.0	TUBELESS	20

*FRONT TIRE FOR CARS AND TRUCKS OVER 3,000 LBS. CAUTION: IT IS NOT RECOMMENDED THAT RADIAL AND NON-RADIAL TIRES BE MIXED ON THE SAME VEHICLE.

M/T[®] PROMO/ P.O.P. MATERIALS

SOLD HERE DECAL



STICKERS



CONTINGENCY DECAL



SHOWROOM POSTER HOLDER

- Includes 3 double-sided posters / 17x22"



TIRE INSERT

- For best FIT use 17" Tire



TIRE STAND



TIRE FLOOR STAND DISPLAY

- 18" wide/Adjustable Height to fit up 35" Tire



M/T[®] APPAREL

POCKET GUIDES

- Light Truck & Drag/Street



PRODUCT CATALOG



COUNTER POCKET GUIDE HOLDER

- 8.75" wide x 12.75" Tall



FOR MORE APPAREL/GEAR VISIT

MICKEYTHOMPSONPROMO.COM



12X24" ALUMINUM SIGN



3'X8' SHOP BANNER





MICKEYTHOMPSONTIRES.COM / M/T PROUDLY MAKES TIRES IN THE USA.

4651 Prosper Drive • Show, OH 44224 / (330) 928-9092 / Toll Free (800) 222-9092 / Fax (330) 928-0503
All specifications subject to change without notice/Not responsible for typographical errors / Printed in USA - 4/2020